



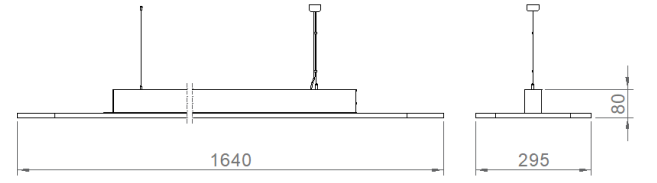

RAL 9005 RAL 9006

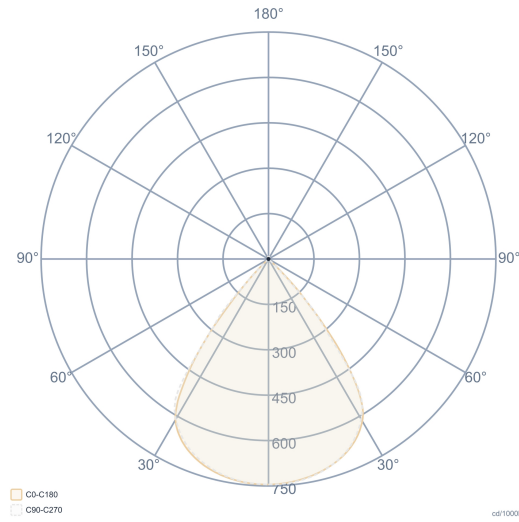

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	30W	Light Output Angle	80°
Panel	Acoustic Felt	Power Factor	>0.95	UGR Value	UGR ≤ 16
Optics	Optical Reflector	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Product Dimensions [mm]	295(W)x1640(L)x80(H)	LED Driver	Constant Current		
Mounting Type	Pendant	Ambient Temperature	-20°C / +50°C		
Mounting Part	Height Adjustable Steel Wire	LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
01183.21.30.035.N000.S	30	3500	3000	295x1640x80	4,50
01183.21.40.036.N000.S	30	3600	4000	295x1640x80	4,50