



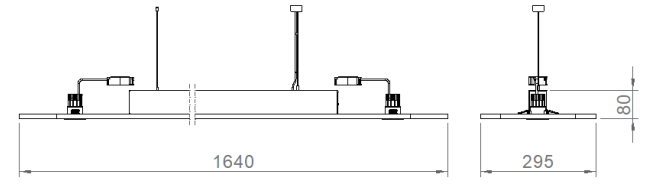

RAL 9005 RAL 9006

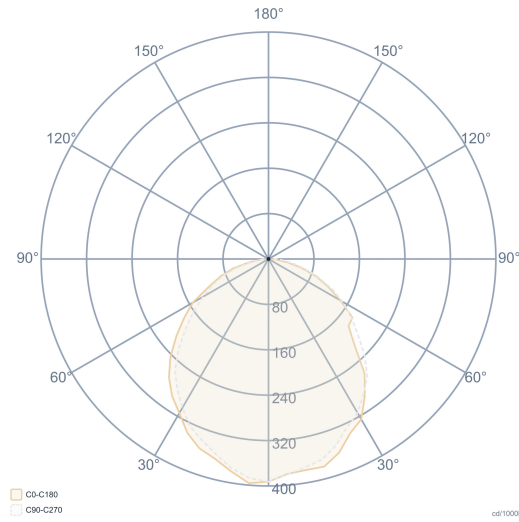

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	42W+12W	Light Output Angle	120°
Housing	Aluminum Injection (Spot)	Power Factor	>0.95	UGR Value	UGR ≤ 22
Panel	Acoustic Felt	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Optics	Opal Diffuser	Cabling	Halogen-Free	Thousand Value	Mc Adams ≤ 3
Paint	Electrostatic Powder Paint	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Insulation Class	Class I	LED Driver	Constant Current		
Product Dimensions [mm]	295(W)x1640(L)x80(H)	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		
Mounting Type	Pendant	DALI / 1-10V			
Mounting Part	Height Adjustable Steel Wire	CRI>90 , 2700K–6500K , Tunable White			
		Emergency Lighting Unit			

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
01183.21.30.047.N000.S	42+12	4700	3000	295x1640x80	5,00
01183.21.40.049.N000.S	42+12	4900	4000	295x1640x80	5,00