


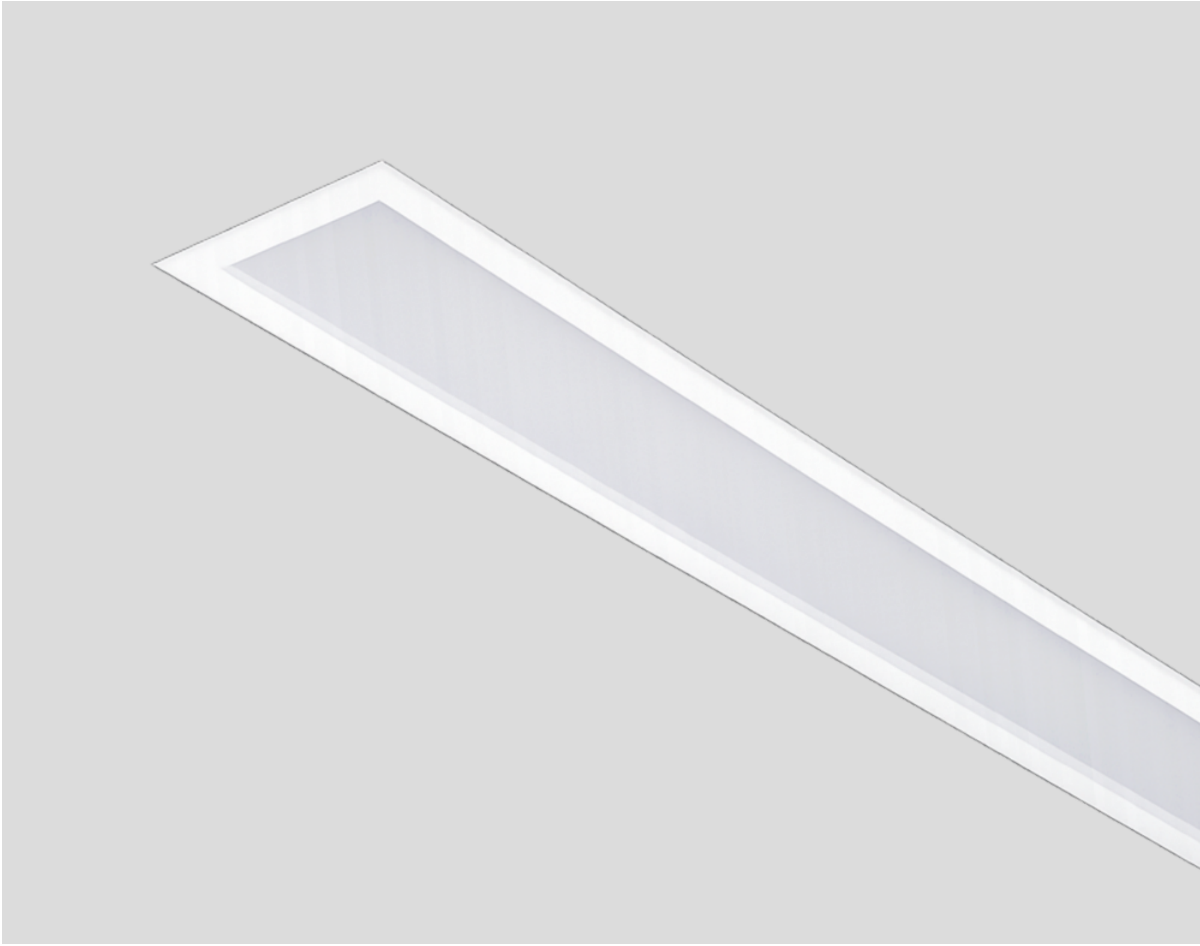


WATERLINE 100-IP65

01194

Embedded Linear Solution for Harsh Environments

Waterline 100 is the flush-mounted version of the Waterline family, offering architectural integrity with a high level of protection. Thanks to its IP65 protection class and IK10 impact resistance, it is resistant to dust, moisture, and mechanical damage. Its aluminum housing and special silicone-sealed diffuser system ensure long-lasting use and leak-proof performance. The opal diffuser, offering homogeneous light distribution, enhances visual comfort and creates a seamless lighting effect.

It provides a durable and aesthetically pleasing solution for high-traffic areas such as metro stations, high-speed train platforms, tunnels, underpasses, parking lots, technical areas, and industrial facilities. It can be customized to project specifications with different length, color temperature, and control options.

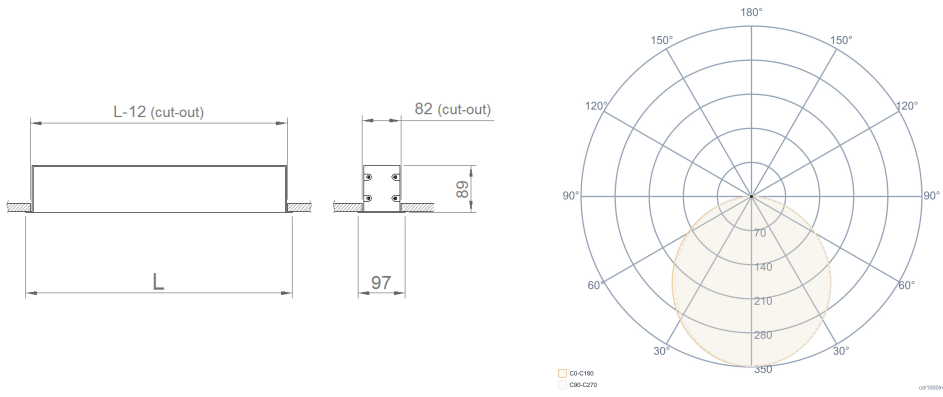

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	18-65W	Optics	Symmetrical
Side Cover	Aluminum Injection	Power Factor	>0.95	Light Output Angle	110°
Optics	Silicone Sealed Extruded PC	Light Source	SMD Mid Power LED	UGR Value	UGR ≤ 22
Gasket	Silicone	Cabling	Halogen-Free	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	LED Driver	Constant Current	Optional	
Product Dimensions [mm]	97(W) x 90(H)	Ambient Temperature	-20°C / +50°C		
Mounting Type	Recessed	LED Lifetime L70	>50.000 Saat		
Mounting Part	Stainless Spring Steel				
				DALI / 1-10V	
				Tunable White	
				Emergency Lighting Unit	
				CRI>90 , 2700K~6500K , Tunable White	
				2700K ~ 6500K	

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
02156.99.40.041	38	4100	4000	97x90x1165	2,90