




RAL 9006

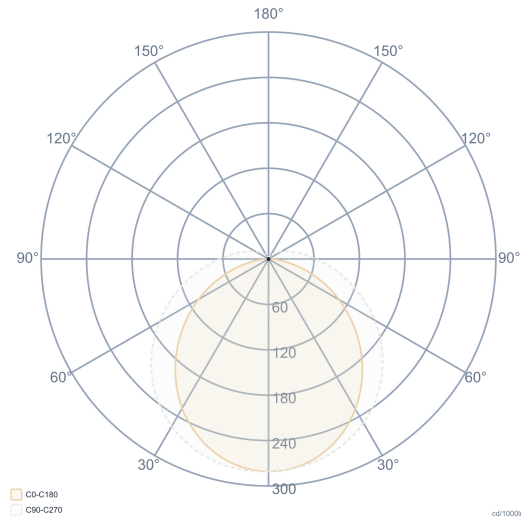

General Information		Electrical Info		Lighting Technology	
Housing	CO-EX PC Extrusion	Power	17-51W	Light Output Angle	120°
Side Cover	PC Injection	Power Factor	>0.95	UGR Value	UGR ≤ 22
Inner plate	Aluminum Extrusion (LED Assembly)	Light Source	Mid Power LED	CRI [Ra]	CRI ≥ 80
Gasket	Transparent Silicone (inside the side cover)	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional	DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit
Product Dimensions [mm]	56(W) x 68(H)	LED Driver	Constant Current		
Mounting Type	Surface and Pendant	Ambient Temperature	-20°C / +50°C		
Mounting Part	Stainless Spring Steel	LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	L (mm)
07105.06.30.021	17	2100	3000	580
07105.06.40.022	17	2200	4000	580
07105.08.30.033	25	3300	3000	860
07105.08.40.034	25	3400	4000	860
07105.12.30.046	34	4600	3000	1140
07105.12.40.047	34	4700	4000	1140
07105.14.30.057	42	5700	3000	1420
07105.14.40.058	42	5800	4000	1420
07105.14.30.067	51	6700	3000	1420
07105.14.40.068	51	6800	4000	1420