





LIGHTLINE-043

01180

Indoor Pendant Lighting Luminaire

The Lightline 43 Series offers homogeneous and comfortable lighting with its compact profile structure and diffuser-based optical system. Thanks to its opal diffuser, it provides a soft and balanced light distribution, enhancing visual comfort. Its 43 mm wide aluminum body and screwless side cover design offer a simple and integrated look. Maintenance and replacement are easily performed thanks to the special spring system within the modular LED structure.

Its structure, suitable for linear configurations, allows for solutions in X, Y, and various geometric forms. It adapts to project-specific applications with different power, color temperature, and control options. It meets different architectural needs with pendant and surface mounting alternatives.

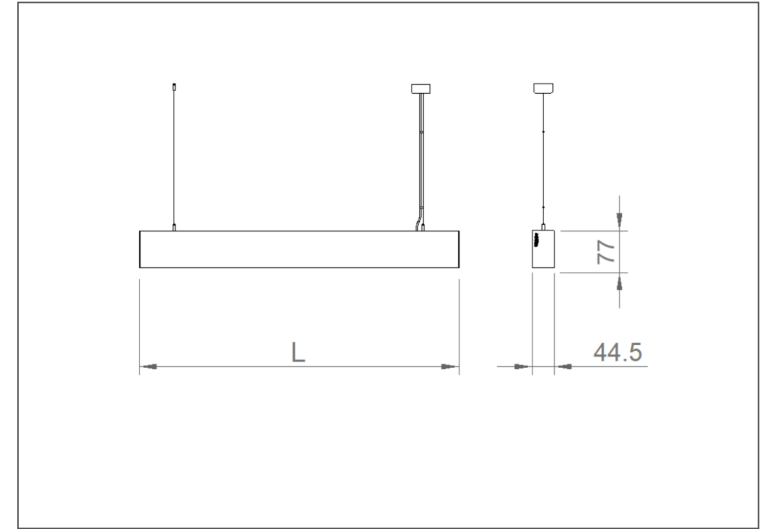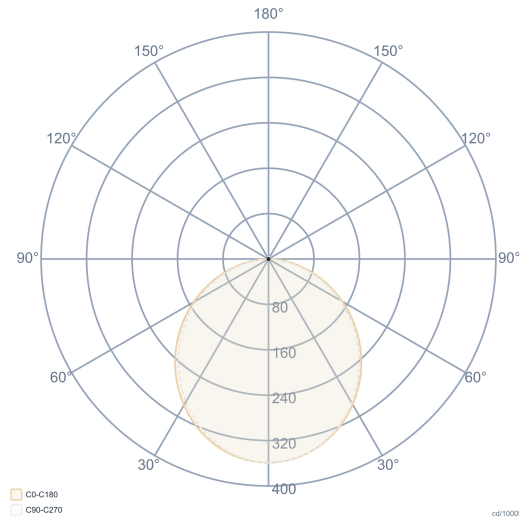

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	15-44W	Light Output Angle	120°
Side Cover	Aluminum Injection	Power Factor	>0.95	UGR Value	UGR ≤ 22
Optics	Opal Diffuser	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Product Dimensions [mm]	45(W) x 74(H)	LED Driver	Constant Current		
Mounting Type	Pendant	Ambient Temperature	-20°C / +50°C		
Mounting Part	Height Adjustable Steel Wire	LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	L (mm)	Kg
01180.43.30.011	15	1100	3000	575	1,40
01180.43.40.012	15	1200	4000	575	1,40
01180.43.30.019	22	1900	3000	855	1,80
01180.43.40.020	22	2000	4000	855	1,80
01180.43.30.026	30	2600	3000	1135	2,00
01180.43.40.027	30	2700	4000	1135	2,00
01180.43.30.033	36	3300	3000	1415	2,40
01180.43.40.034	36	3400	4000	1415	2,40
01180.43.30.041	44	4000	3000	1695	2,80
01180.43.40.041	44	4100	4000	1695	2,80