

LIGHTLINE-043

01180


Indoor Pendant Lighting Luminaire


The Lightline 43 Series offers homogeneous and comfortable lighting with its compact profile structure and diffuser-based optical system. Thanks to its opal diffuser, it provides a soft and balanced light distribution, enhancing visual comfort. Its 43 mm wide aluminum body and screwless side cover design offer a simple and integrated look. Maintenance and replacement are easily performed thanks to the special spring system within the modular LED structure.

Its structure, suitable for linear configurations, allows for solutions in X, Y, and various geometric forms. It adapts to project-specific applications with different power, color temperature, and control options. It meets different architectural needs with pendant and surface mounting alternatives.



RAL 9016 RAL 9005 RAL 9006

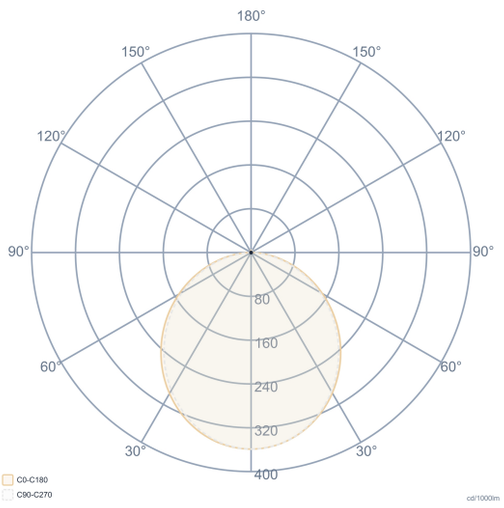

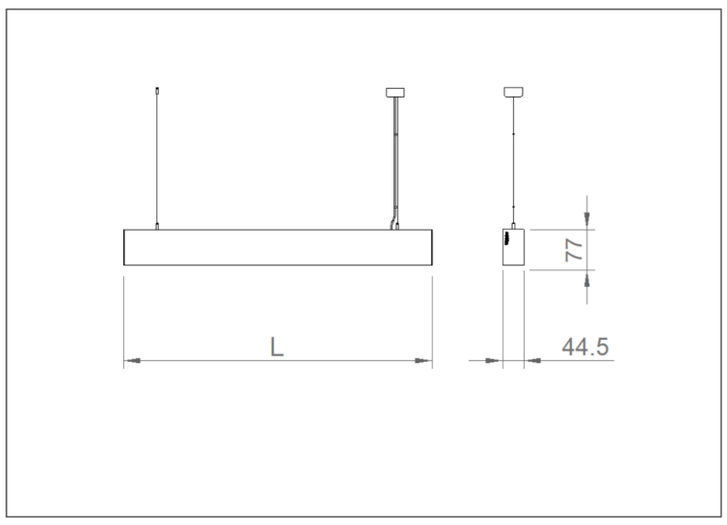

General Information	
Housing	Aluminum Extruded
Side Cover	Aluminum İnjection
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	45(W) x 74(H)
Mounting Type	Pendant
Mounting Part	Height Adjustable Steel Wire

Electrical Info	
Power	15-44W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)	Kg
01180.43.30.011	15	1100	3000	575	1,40
01180.43.40.012	15	1200	4000	575	1,40
01180.43.30.019	22	1900	3000	855	1,80
01180.43.40.020	22	2000	4000	855	1,80
01180.43.30.026	30	2600	3000	1135	2,00
01180.43.40.027	30	2700	4000	1135	2,00
01180.43.30.033	36	3300	3000	1415	2,40
01180.43.40.034	36	3400	4000	1415	2,40
01180.43.30.041	44	4000	3000	1695	2,80
01180.43.40.041	44	4100	4000	1695	2,80

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com