

LIGHTLINE-049 D


01180


Indoor Pendant-Direct Lighting Fixture

The Lightline 49 Series creates a balanced, spacious, and homogeneous lighting effect in a space with its direct lighting character.

Its opal diffuser provides a soft and comfortable distribution of direct light, enhancing visual comfort. It offers project-specific solutions with different power, profile lengths, color temperature, and control options. It is suitable for pendant mounting applications in office, commercial, and architectural projects for both functional and atmospheric lighting.

RAL 9016 RAL 9005 RAL 9006

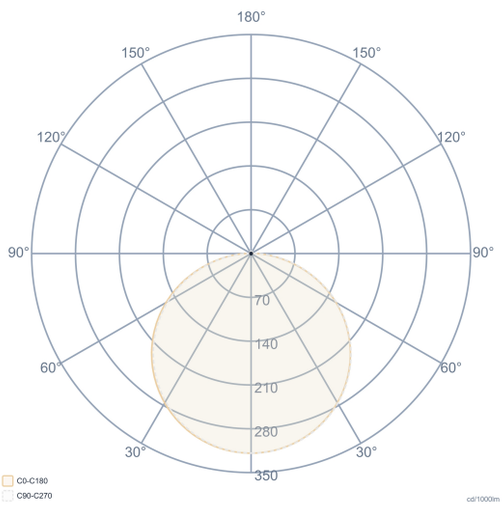

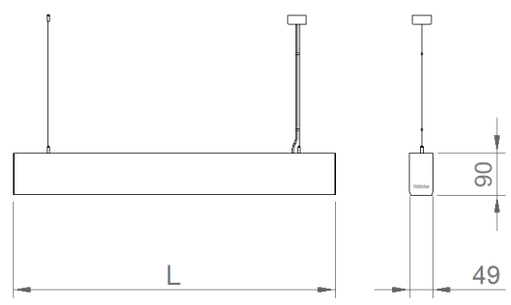

General Information	
Housing	Aluminium Extruded
Side Cover	Aluminium Injection
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	48(W) x 90(H)

Electrical Info	
Power	31-45W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)	Kg
01180.49.30.031	31	3000	3000	1135	2,60
01180.49.40.032	31	3240	4000	1135	2,60
01180.49.30.038	37	3760	3000	1415	3,20
01180.49.40.039	37	3960	4000	1415	3,20
01180.49.30.046	45	4575	3000	1695	3,90
01180.49.40.047	45	4815	4000	1695	3,90

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com