





LIGHTLINE-049 D

01180

Indoor Pendant-Direct Lighting Fixture

The Lightline 49 Series creates a balanced, spacious, and homogeneous lighting effect in a space with its direct lighting character.

Its opal diffuser provides a soft and comfortable distribution of direct light, enhancing visual comfort. It offers project-specific solutions with different power, profile lengths, color temperature, and control options. It is suitable for pendant mounting applications in office, commercial, and architectural projects for both functional and atmospheric lighting.

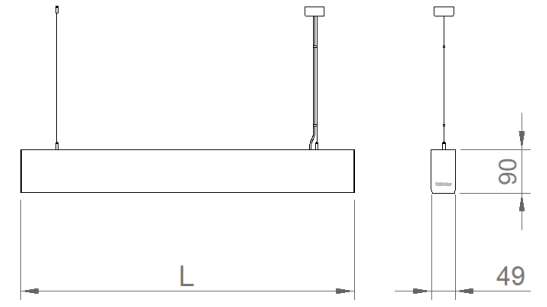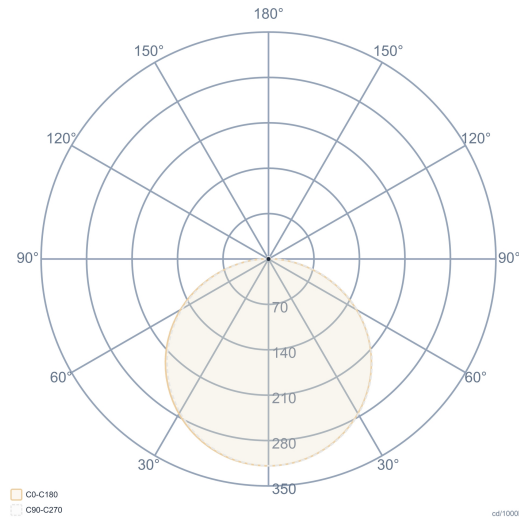

General Information		Electrical Info		Lighting Technology	
Housing	Aluminium Extruded	Power	31-45W	Light Output Angle	120°
Side Cover	Aluminium Injection	Power Factor	>0.95	UGR Value	UGR ≤ 22
Optics	Opal Diffuser	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Product Dimensions [mm]	48(W) x 90(H)	LED Driver	Constant Current		
		Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	L (mm)	Kg
01180.49.30.031	31	3000	3000	1135	2,60
01180.49.40.032	31	3240	4000	1135	2,60
01180.49.30.038	37	3760	3000	1415	3,20
01180.49.40.039	37	3960	4000	1415	3,20
01180.49.30.046	45	4575	3000	1695	3,90
01180.49.40.047	45	4815	4000	1695	3,90

