

LIGHTLINE-049 D/I


01180


Indoor Pendant - Direct/Indirect Lighting Fixture

The Lightline 49 Series stands out with its direct and indirect lighting characteristics. Thanks to the indirect light it directs towards the ceiling, it creates a more balanced, spacious, and homogeneous lighting effect in the space.

With its opal diffuser, it provides a soft and comfortable distribution of direct light, while its indirect component enhances the perception of space and increases visual comfort. It offers project-specific solutions with different power, profile lengths, color temperature, and control options. The office is suitable for pendant mounting applications for both functional and atmospheric lighting in commercial and architectural projects.

RAL 9016 RAL 9005 RAL 9006

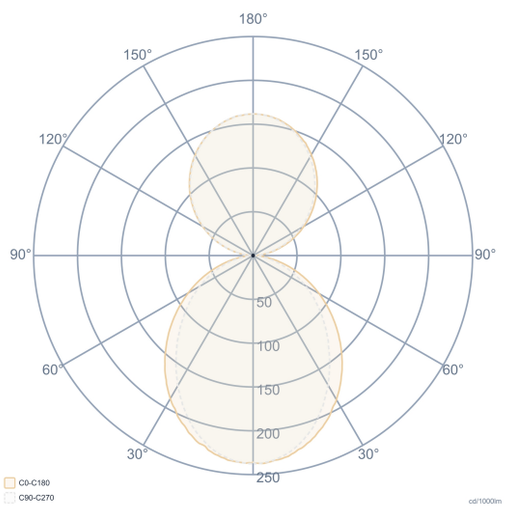

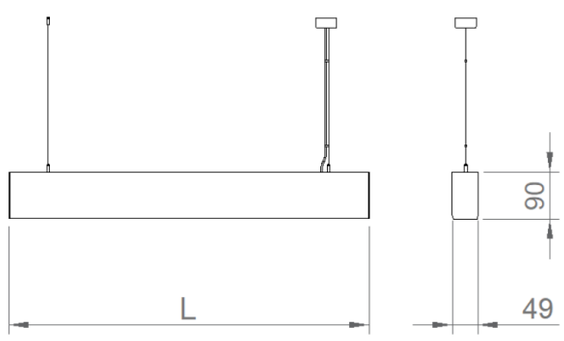

General Information	
Housing	Aluminum Extruded
Side Cover	Aluminum Injection
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	48(W) x 90(H)
Mounting Type	Pendant
Mounting Part	Height Adjustable Steel Wire

Electrical Info	
Power	51W - 78W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120° (Direct/Indirect)
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	Kg	Direct	Indirect	L (mm)	Control
01180.49.30.055	51	5424	3000	2,60	60%	40%	1135	Tek
01180.49.40.057	51	5750	4000	2,60	60%	40%	1135	Tek
01180.49.30.070	65	6926	3000	3,20	60%	40%	1415	Tek
01180.49.40.072	65	7291	4000	3,20	60%	40%	1415	Tek
01180.49.30.085	78	8305	3000	3,90	60%	40%	1695	Tek
01180.49.40.087	78	8742	4000	3,90	60%	40%	1695	Tek
01180.49.30.055	51	5424	3000	2,60	60%	40%	1135	Çift
01180.49.40.057	51	5750	4000	2,60	60%	40%	1135	Çift
01180.49.30.070	65	6926	3000	3,20	60%	40%	1415	Çift
01180.49.40.072	65	7291	4000	3,20	60%	40%	1415	Çift
01180.49.30.085	78	8305	3000	3,90	60%	40%	1695	Çift
01180.49.40.087	78	8742	4000	3,90	60%	40%	1695	Çift

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com