

Lightline - 049 D/E

Direkt/Endirekt

Indoor Lighting - Pendant Lighting



Colour Options



Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	Aluminum Injection
Diffuser	Opal Diffuser with High Light Transmission
Paint	Electrostatic Powder Paint
Dimensions(mm)	48(W) x 90(H)

OPTICAL SPECIFICATIONS

Optics	Direct - Indirect
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	51W-78W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Pendant
Mounting Apparatus	Height Adjustable Steel Wire

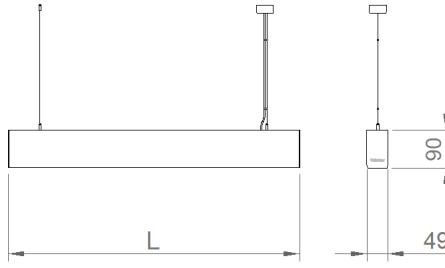

Order Code	W	Lm	CCT	CRI	Direct	Indirect	L (mm)	Burnin g Patter n	Kg
01180.49.40.072	65	7291	4000	Ra>80	60%	40%	1415	Çift Kontrol	3,2
01180.49.40.072	65	7291	4000	Ra>80	60%	40%	1415	Tek Kontrol	3,2

