
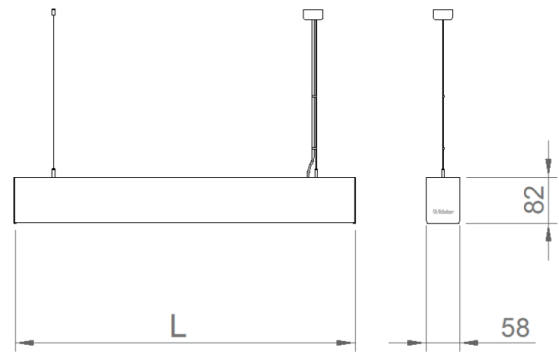


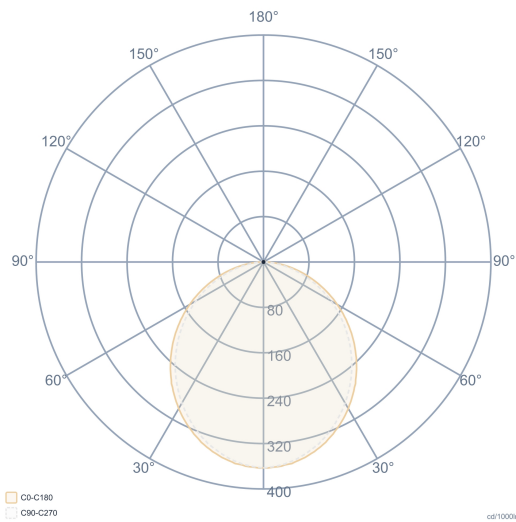

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	16-62W	Light Output Angle	120°
Side Cover	Aluminum Injection	Power Factor	>0.95	UGR Value	UGR ≤ 22
Optics	Opal Diffuser	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogjen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Product Dimensions [mm]	58(W) x 82(H)	LED Driver	Constant Current		
Mounting Type	Pendant	Ambient Temperature	-20°C / +50°C		
Mounting Part	Height Adjustable Steel Wire	LED Lifetime L70	>50.000 Hour		
				DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Lm	CCT	L (mm)	Kg
01180.57.30.015	16	1450	3000	575	1,30
01180.57.40.016	16	1570	4000	575	1,30
01180.57.30.021	21	1680	3000	575	1,30
01180.57.40.022	21	1770	4000	575	1,30
01180.57.30.023	22	1950	3000	855	2,00
01180.57.40.024	22	2075	4000	855	2,00
01180.57.30.032	31	2700	3000	855	2,00
01180.57.40.033	31	2800	4000	855	2,00
01180.57.30.031	29	2400	3000	1135	2,70
01180.57.40.032	29	2500	4000	1135	2,70
01180.57.30.043	42	3250	3000	1135	2,70
01180.57.40.044	42	3400	4000	1135	2,70
01180.57.30.038	36	3200	3000	1415	3,20
01180.57.40.039	36	3350	4000	1415	3,20
01180.57.30.053	52	4550	3000	1415	3,20
01180.57.40.055	52	4700	4000	1415	3,20
01180.57.30.046	43	3900	3000	1695	3,70
01180.57.40.048	43	4100	4000	1695	3,70
01180.57.30.064	62	5640	3000	1695	3,70
01180.57.40.066	62	5900	4000	1695	3,70

Verilen tüm teknik ve diğer değerler nominal değerlerdir. Işık akısı ve bağlı elektriksel değerler, +/- %10 luk bir başlangıç toleransı ile verilmektedir. Renk sıcaklığı toleransı: ±100 K. Katalogta ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir. İkizler Aydınlatma ürünlerinde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. www.ikizleraydinlatma.com

+90 (216) 397 22 16
info@ikizleraydinlatma.com

