LIGHTLINE MC-058

01180

Pendant Profile with Micro-Prismatic Lens

The Lightline 58 MC Series, with its 58 mm profile width, provides a powerful lighting effect, especially in large spaces, and enhances architectural emphasis. Thanks to its microprismatic lens structure, it distributes light in a controlled manner, reducing glare, and provides high visual comfort in workspaces with a UGR≤19 value.

The aluminum body structure and the side cover design with concealed screw details give the product a simple and integrated look. Its suitability for continuous line applications offers flexible solutions in straight, corner, or custom geometric designs. Different color temperature and control options allow for the creation of project-specific lighting scenarios.

RAL 9016 RAL 9005 RAL 9006

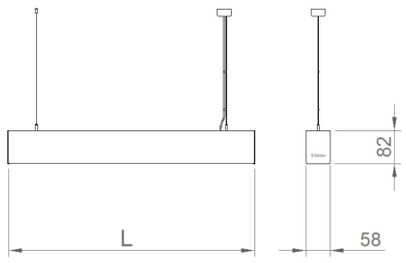

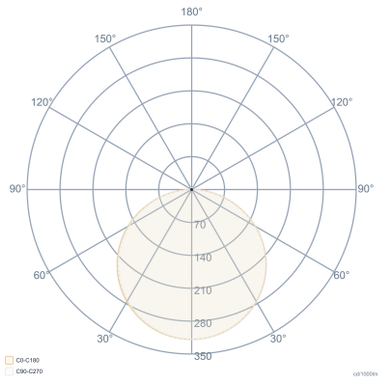

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	**Power**	15-62W	**Light Output Angle**	80°
Side Cover	Aluminum Injection	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 19
Optics	Microprismatic Lens	**Light Source**	SMD Mid Power LED	**CRI [Ra]**	CRI ≥ 80
Paint	Electrostatic Powder Paint	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Insulation Class	Class I	**Input Voltage**	220-240V AC / 50-60 Hz		
Product Dimensions [mm]	58(W) x 82(H)	**LED Driver**	Constant Current	**Optional**	
Mounting Type	Pendant	**Ambient Temperature**	-20°C / +50°C	DALI / 1-10V	
Mounting Part	Height Adjustable Steel Wire	**LED Lifetime L70**	>50.000 Hour	CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Lm	CCT	L (mm)	Kg
01180.57.30.015	15	1300	3000	575	1,30
01180.57.40.016	15	1360	4000	575	1,30
01180.57.30.021	21	1730	3000	575	1,30
01180.57.40.022	21	1770	4000	575	1,30
01180.57.30.023	22	1850	3000	855	2,00
01180.57.40.024	22	1940	4000	855	2,00
01180.57.30.032	31	3030	3000	855	2,00
01180.57.40.033	31	3410	4000	855	2,00
01180.57.30.031	29	2160	3000	1135	2,70
01180.57.40.032	29	2270	4000	1135	2,70
01180.57.30.043	42	3890	3000	1135	2,70
01180.57.40.044	42	4090	4000	1135	2,70
01180.57.30.038	36	3710	3000	1415	3,20
01180.57.40.039	36	3960	4000	1415	3,20
01180.57.30.053	52	5050	3000	1415	3,20
01180.57.40.055	52	5720	4000	1415	3,20
01180.57.30.046	43	4460	3000	1695	3,70
01180.57.40.048	43	4840	4000	1695	3,70
01180.57.30.064	62	6050	3000	1695	3,70
01180.57.40.066	62	6850	4000	1695	3,70

Verilen tüm teknik değerler nominal değerlerdir. Işık akısı ve bağlı elektrik gücü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: 10 SDCM 10 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com