




## LIGHTLINE MC-058

### 01180

#### Pendant Profile with Micro-Prismatic Lens

The Lightline 58 MC Series, with its 58 mm profile width, provides a powerful lighting effect, especially in large spaces, and enhances architectural emphasis. Thanks to its microprismatic lens structure, it distributes light in a controlled manner, reducing glare, and provides high visual comfort in workspaces with a  $UGR \leq 19$  value.

The aluminum body structure and the side cover design with concealed screw details give the product a simple and integrated look. Its suitability for continuous line applications offers flexible solutions in straight, corner, or custom geometric designs. Different color temperature and control options allow for the creation of project-specific lighting scenarios.

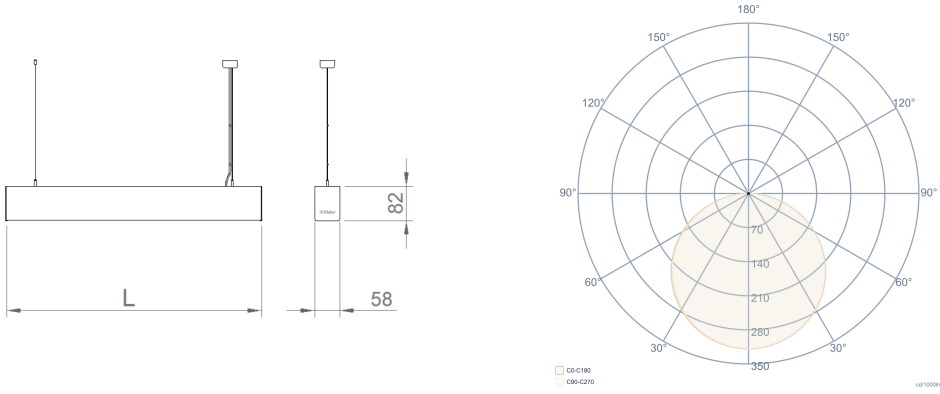

| General Information            |                              | Electrical Info            |                        | Lighting Technology       |                                      |
|--------------------------------|------------------------------|----------------------------|------------------------|---------------------------|--------------------------------------|
| <b>Housing</b>                 | Aluminum Extruded            | <b>Power</b>               | 15-62W                 | <b>Light Output Angle</b> | 80°                                  |
| <b>Side Cover</b>              | Aluminum Injection           | <b>Power Factor</b>        | >0.95                  | <b>UGR Value</b>          | UGR ≤ 19                             |
| <b>Optics</b>                  | Microprismatic Lens          | <b>Light Source</b>        | SMD Mid Power LED      | <b>CRI [Ra]</b>           | CRI ≥ 80                             |
| <b>Paint</b>                   | Electrostatic Powder Paint   | <b>Cabling</b>             | Halogen-Free           | <b>Color Bin Value</b>    | Mc Adams ≤ 3                         |
| <b>Insulation Class</b>        | Class I                      | <b>Input Voltage</b>       | 220-240V AC / 50-60 Hz | <b>Optional</b>           |                                      |
| <b>Product Dimensions [mm]</b> | 58(W) x 82(H)                | <b>LED Driver</b>          | Constant Current       |                           | DALI / 1-10V                         |
| <b>Mounting Type</b>           | Pendant                      | <b>Ambient Temperature</b> | -20°C / +50°C          |                           | CRI>90 , 2700K~6500K , Tunable White |
| <b>Mounting Part</b>           | Height Adjustable Steel Wire | <b>LED Lifetime L70</b>    | >50.000 Hour           |                           | Emergency Lighting Unit              |

| Order Code      | W  | Lm   | CCT  | L (mm) | Kg   |
|-----------------|----|------|------|--------|------|
| 01180.57.40.039 | 36 | 3960 | 4000 | 1415   | 3,20 |

