

Lasting-M

Outdoor Lighting - Urban Lighting, Urban Lighting



Colour Options



TECHNICAL INFORMATION

Housing	Aluminum Injection
Glass	Tempered Clear Glass
Reflector	PMMA Optical Lens
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Asymmetrical
CRI	CRI $\geq$ 70
Color Bin Value	Mc Adams $\leq$ 3

ELECTRICAL



Power (W)	60-100W
Power Factor	>0.95
Light Source	SMD High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-40°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

DALI *
1-10V DIM *
2700K ~ 6500K
Different RAL Color Options
SPD
Plug-in Energy Input Connector
Class-II Protection Class

ASSEMBLY

Installation Type	Surface Mounted
Mounting Apparatus	Ø42-60mm Fixed Aluminum Metal Console

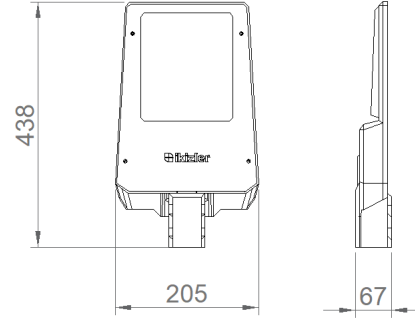

Order Code	W	Lm	Productivity	CCT	WxLxH (mm)	ØD (Console-mm)	Kg
09495.42.40.130	100	13000	130 lm/W	4000	438x205x67mm	42-60	3,5

