

Lasting-L

Outdoor Lighting - Urban Lighting, Urban Lighting



Colour Options



TECHNICAL INFORMATION

Housing	Aluminum Injection
Glass	Tempered Clear Glass
Reflector	PMMA Optical Lens
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Asymmetrical
CRI	CRI $\geq$ 70
Color Bin Value	Mc Adams $\leq$ 3

ELECTRICAL



Power (W)	125-150W
Power Factor	>0.95
Light Source	SMD High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-40°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

DALI *
1-10V DIM *
2700K ~ 6500K
Different color options
SPD
Plug-in Energy Input Connector
Class-II Protection Class

ASSEMBLY

Installation Type	Surface Mounted
Mounting Apparatus	Ø42-60mm Sabit Aluminyum Metal Konsol

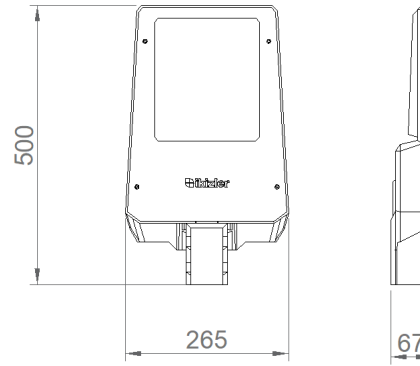

Order Code	W	Lm	Productivity	CCT	WxLxH (mm)	ØD (Cons-ole-mm)	Kg
09495.52.40.210	150	21000	140 lm/W	4000	500x265x67	42-60	4

