



LUMI


05381

Direct the light with a compact design

Lumi is a compact recessed spotlight solution that adapts to different architectural needs with its Ø65mm and Ø85mm housing options. Thanks to its recessed light source, honeycomb optical accessory, and $UGR \leq 14$ rating, it minimizes glare, offering maximum visual comfort. With beam angles of 15°, 24°, and 38° and a $\pm 30^\circ$ adjustable housing, it allows for precise light targeting. Its IP44 protection class and modern design combine high performance and aesthetics in office, retail, hotel, residential, and other architectural interior projects.



RAL 9016

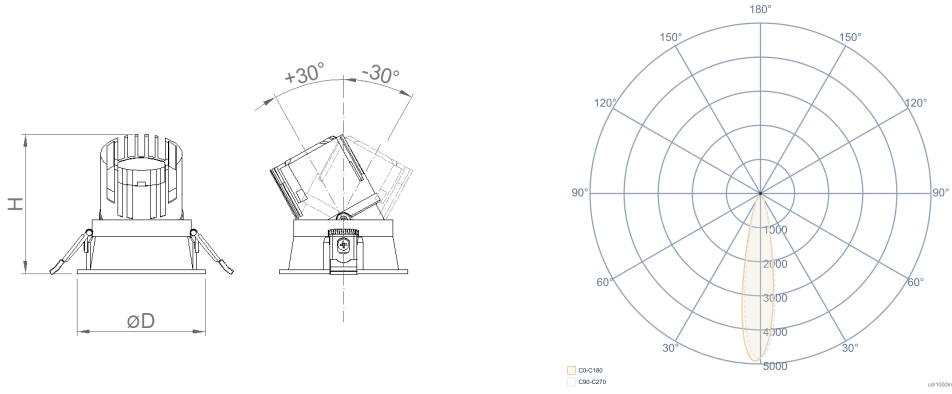

General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Injection	Power	8W-11W	Light Output Angle	15°-24°-38°
Optics	Lens + Reflector	Light Source	COB LED	UGR Value	UGR≤14
Accessories	Honeycomb	Cabling	Halojen-Free	CRI [Ra]	CRI ≥ 80
Adjustable Body	+30°/ -30°	Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
Paint	Electrostatic Powder Coating	LED Driver	Constant Current	Optional	
Insulation Class	Class II	Ambient Temperature	-20°C / +50°C		
Product Dimensions [mm]	Ø64-Ø72	LED Lifetime L70	>50.000 Hour		
Mounting Type	Recessed				
Mounting Part	Steel Spring				

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
05381.80.30.008	11	1060	15°/24°/38°	3000	Ø85x88	Ø75	0,40

