LUMI

05381

Direct the light with a compact design

Lumi is a compact recessed spotlight solution that adapts to different architectural needs with its Ø65mm and Ø85mm housing options. Thanks to its recessed light source, honeycomb optical accessory, and UGR≤14 rating, it minimizes glare, offering maximum visual comfort. With beam angles of 15°, 24°, and 38° and a ±30° adjustable housing, it allows for precise light targeting. Its IP44 protection class and modern design combine high performance and aesthetics in office, retail, hotel, residential, and other architectural interior projects.

RAL 9016

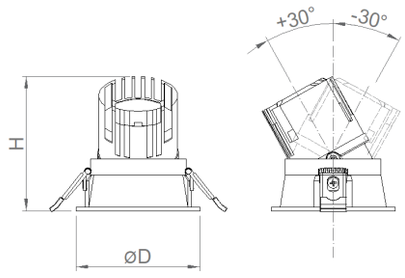

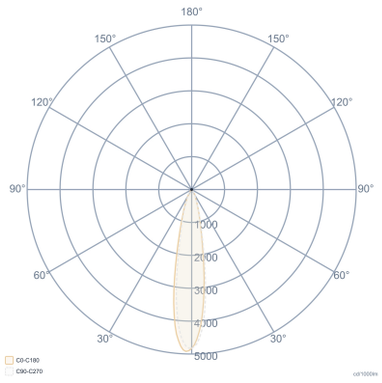

General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Injection	**Power**	8W-11W	**Light Output Angle**	15°-24°-38°
Optics	Lens + Reflector	**Light Source**	COB LED	**UGR Value**	UGR≤14
Accessories	Honeycomb	**Cabling**	Halojen-Free	**CRI [Ra]**	CRI ≥ 80
Adjustable Body	+30°/ -30°	**Input Voltage**	220-240V AC / 50-60 Hz	**Color Bin Value**	Mc Adams ≤ 3
Paint	Electrostatic Powder Coating	**LED Driver**	Constant Current		
Insulation Class	Class II	**Ambient Temperature**	-20°C / +50°C	**Optional**	
Product Dimensions [mm]	Ø64-Ø72	**LED Lifetime L70**	>50.000 Hour	DALI / 1-10V	
Mounting Type	Recessed			CRI>90 , 2700K~6500K , Tunable White	
Mounting Part	Steel Spring			Emergency Lighting Unit	

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
05381.80.40.008	11	1140	15°/24°/38°	4000	Ø85x88	Ø75	0,40

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com