

# Lumi-085

Indoor Lighting - Spot Lighting



Colour Options



Ral 9016



Ral 9005

## TECHNICAL INFORMATION

|                        |                            |
|------------------------|----------------------------|
| <b>Housing</b>         | Aluminum Injection         |
| <b>Frame</b>           | Aluminum Injection         |
| <b>Reflector</b>       | Optical Lens               |
| <b>Accessories</b>     | Honeycomb                  |
| <b>Adjustable Body</b> | +30° / -30°                |
| <b>Paint</b>           | Electrostatic Powder Paint |

## OPTICAL SPECIFICATIONS

|                           |              |
|---------------------------|--------------|
| <b>Optics</b>             | Symmetrical  |
| <b>Light Output Angle</b> | 15°-24°-38°  |
| <b>UGR Value</b>          | UGR≤14       |
| <b>CRI</b>                | CRI ≥ 80     |
| <b>Color Bin Value</b>    | Mc Adams ≤ 3 |

## ELECTRICAL



|                            |                                         |
|----------------------------|-----------------------------------------|
| <b>Power (W)</b>           | 11W                                     |
| <b>Light Source</b>        | COB LED                                 |
| <b>Cabling</b>             | Halojen-Free                            |
| <b>Input Voltage</b>       | 220-240V AC / 50-60 Hz                  |
| <b>LED Driver</b>          | High Efficiency Constant Current Output |
| <b>LED Lifetime L80B50</b> | >50.000 Saat                            |

## OPTIONAL

DALI  
Emergency Lighting Unit  
2700K ~ 6500K  
CRI > 90  
Class-I Protection Class  
1-10V DIM

## ASSEMBLY

|                           |               |
|---------------------------|---------------|
| <b>Installation Type</b>  | Under Plaster |
| <b>Mounting Apparatus</b> | Steel Spring  |

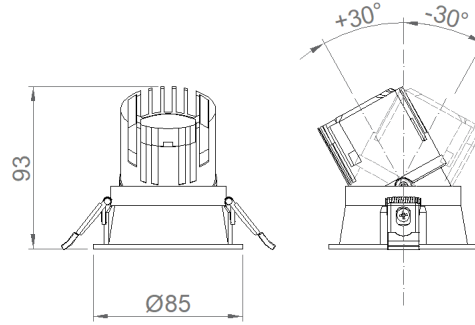

| Order Code      | W  | Lm   | Angle       | CCT  | ØDx(H)   | Cut-out dimensions (mm) | Kg  |
|-----------------|----|------|-------------|------|----------|-------------------------|-----|
| 05381.64.40.008 | 11 | 1140 | 15°/24°/38° | 4000 | Ø85x88mm | Ø75mm                   | 0,4 |

