

Panoramic-M

Outdoor Lighting - Street Lighting, Urban Lighting



Colour Options



Ral 9005

TECHNICAL INFORMATION

Housing Corrosion Resistant Aluminum
Diffuser High UV Resistant PMMA Lens
Paint Electrostatic Powder Paint
LED/Beam Angle ~50° wide beam / ~20°+115° Oval beam

OPTICAL SPECIFICATIONS

Optics Symmetrical / Asymmetrical
UGR Value UGR≤16
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3


ELECTRICAL

Power (W) 14-26W
Power Factor >0.95
Light Source High Power LED
Cabling Halojen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -30°C / +60°C
LED Lifetime L80B50 >50.000 Saat

OPTIONAL

ASSEMBLY

Installation Type Surface Mounted

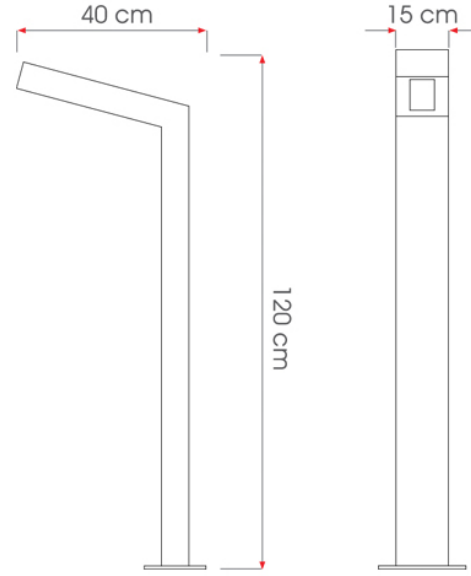

Order Code	W	Lm	CCT	CRI	WxH (mm)
09336.41.30.016	14	1680	3000	Ra>80	400x1200
09336.41.40.016	14	1800	4000	Ra>80	400x1200
09336.41.30.031	26	3120	3000	Ra>80	400x1200
09336.41.40.031	26	3400	4000	Ra>80	400x1200

