
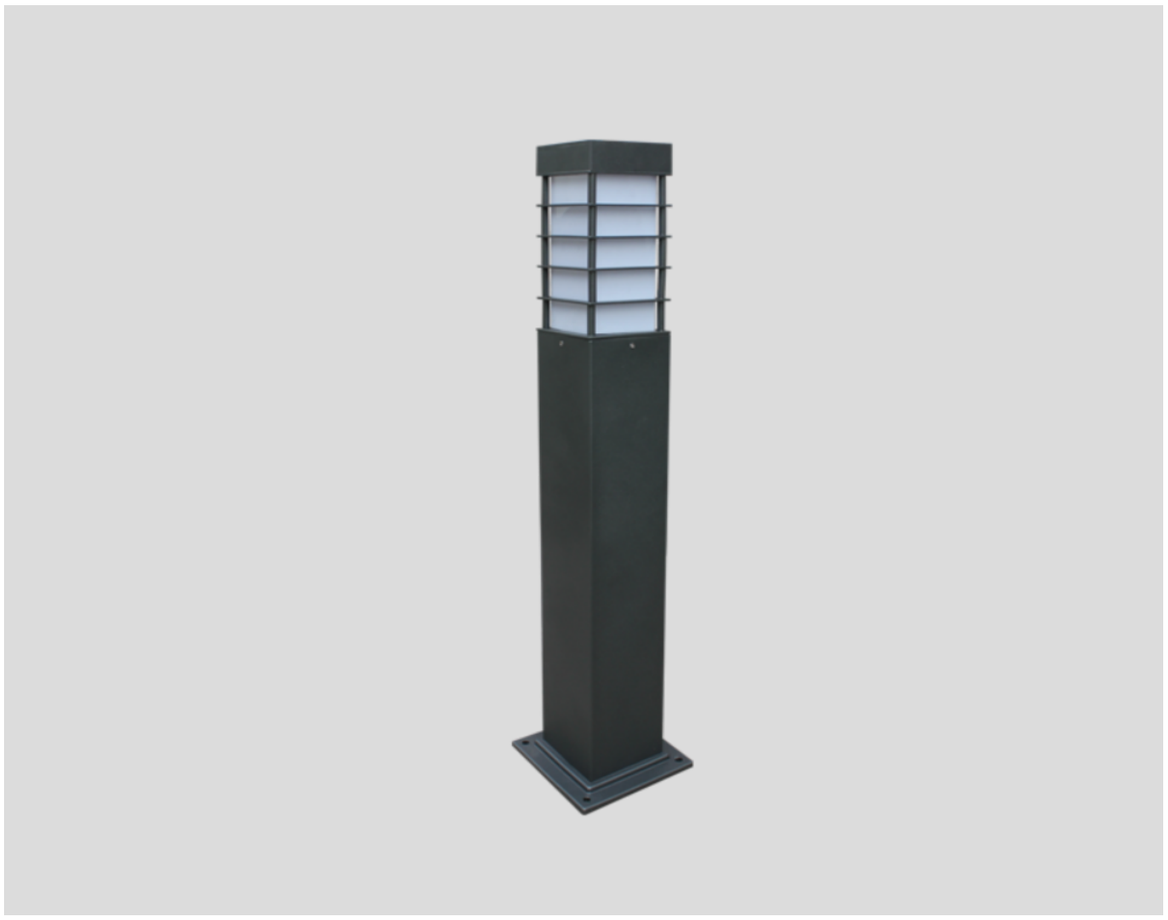


VEGA

09346

RAL 9005

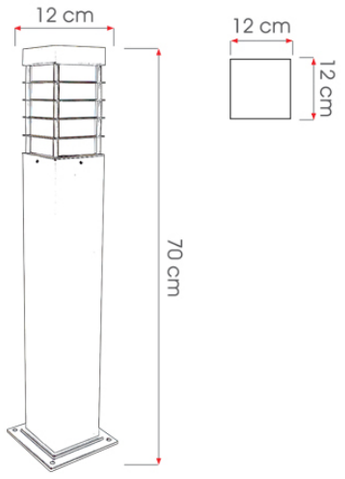

General Information	
Housing	Corrosion Resistant Aluminum
Optics	PMMA Lens
Paint	Electrostatic Powder Paint
LED/Beam Angle	~50° wide beam /~20°+115° Oval beam
Diffuser	Opaque Polycarbonate
Insulation Class	Class I
Product Dimensions [mm]	120(W)x120(L)x700(H)
Mounting Type	Surface

Electrical Info	
Power	10-20W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Saat

Lighting Technology	
UGR Value	UGR≤16
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)
09346.17.30.012	10	1200	3000	120x120x700
09346.17.40.012	10	1300	4000	120x120x700
09346.17.30.024	20	2400	3000	120x120x700
09346.17.40.024	20	2500	4000	120x120x700

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com