


STRIX

09356

RAL 9005

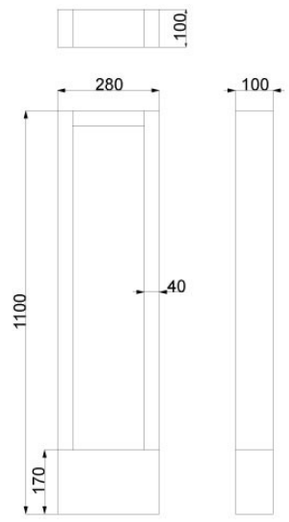

General Information		Electrical Info		Lighting Technology	
Housing	Corrosion Resistant Aluminum	**Power**	14-24W	**UGR Value**	UGR≤16
Optics	PMMA Lens	**Power Factor**	>0.95	**CRI [Ra]**	CRI ≥ 80
Glass	Tempered Clear Glass	**Light Source**	High Power LED	**Color Bin Value**	Mc Adams ≤ 3
Paint	Electrostatic Powder Paint	**Input Voltage**	220-240V AC / 50-60 Hz		
Insulation Class	Class I	**LED Driver**	Constant Current		
Product Dimensions [mm]	280(W)x100(H)x1100(L)	**Ambient Temperature**	-30°C / +60°C		
Mounting Type	Surface	**LED Lifetime L70**	>102.000 Saat		
		Cabling	Halojen-Free		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxHxL (mm)
09356.27.30.016	14	1400	3000	280x100x1100
09356.27.40.016	14	1540	4000	280x100x1100
09356.27.30.042	24	2400	3000	280x100x1100
09356.27.40.042	24	2650	4000	280x100x1100

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com