




STRIX

09356



RAL 9005

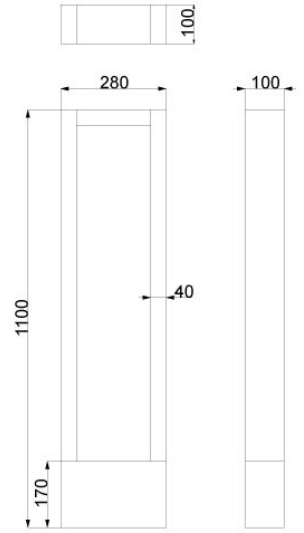

General Information		Electrical Info		Lighting Technology	
Housing	Corrosion Resistant Aluminum	Power	14-24W	UGR Value	UGR≤16
Optics	PMMA Lens	Power Factor	>0.95	CRI [Ra]	CRI ≥ 80
Glass	Tempered Clear Glass	Light Source	High Power LED	Color Bin Value	Mc Adams ≤ 3
Paint	Electrostatic Powder Paint	Input Voltage	220-240V AC / 50-60 Hz	Optional	DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit
Insulation Class	Class I	LED Driver	Constant Current		
Product Dimensions [mm]	280(W)x100(H)x1100(L)	Ambient Temperature	-30°C / +60°C		
		LED Lifetime L70	>50.000 Saat		
Mounting Type	Surface	Cabling	Halojen-Free		

Order Code	W	Lm	CCT	WxHxL (mm)
09356.27.30.016	14	1400	3000	280x100x1100
09356.27.40.016	14	1540	4000	280x100x1100
09356.27.30.042	24	2400	3000	280x100x1100
09356.27.40.042	24	2650	4000	280x100x1100

