
VIYOLA

09593



RAL 9016

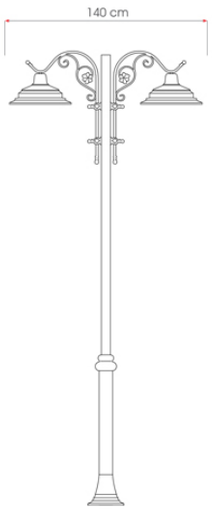

General Information	
Housing	Corrosion Resistant Aluminum Injection Body
Pole	Corrosion Resistant Galvanized Steel Body
Optics	PMMA Lens + Glass
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	1400(W)x3000/4000(L)
Mounting Type	Surface

Electrical Info	
Power	2x41-2x112W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	60° / 150°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White

Order Code	W	Lm	CCT	WxL (mm)
09593.13.30.106	2x41	10130	3000	1400x3000
09593.13.40.106	2x41	10660	4000	1400x3000
09593.13.30.148	2x57	14080	3000	1400x4000
09593.13.40.148	2x57	14820	4000	1400x4000
09593.13.30.221	2x85	21000	3000	1400x4500
09593.13.40.221	2x85	22100	4000	1400x4500
09593.13.30.291	2x112	28500	3000	1400x6000
09593.13.40.291	2x112	29200	4000	1400x6000

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com