





ALFOT-K

09595

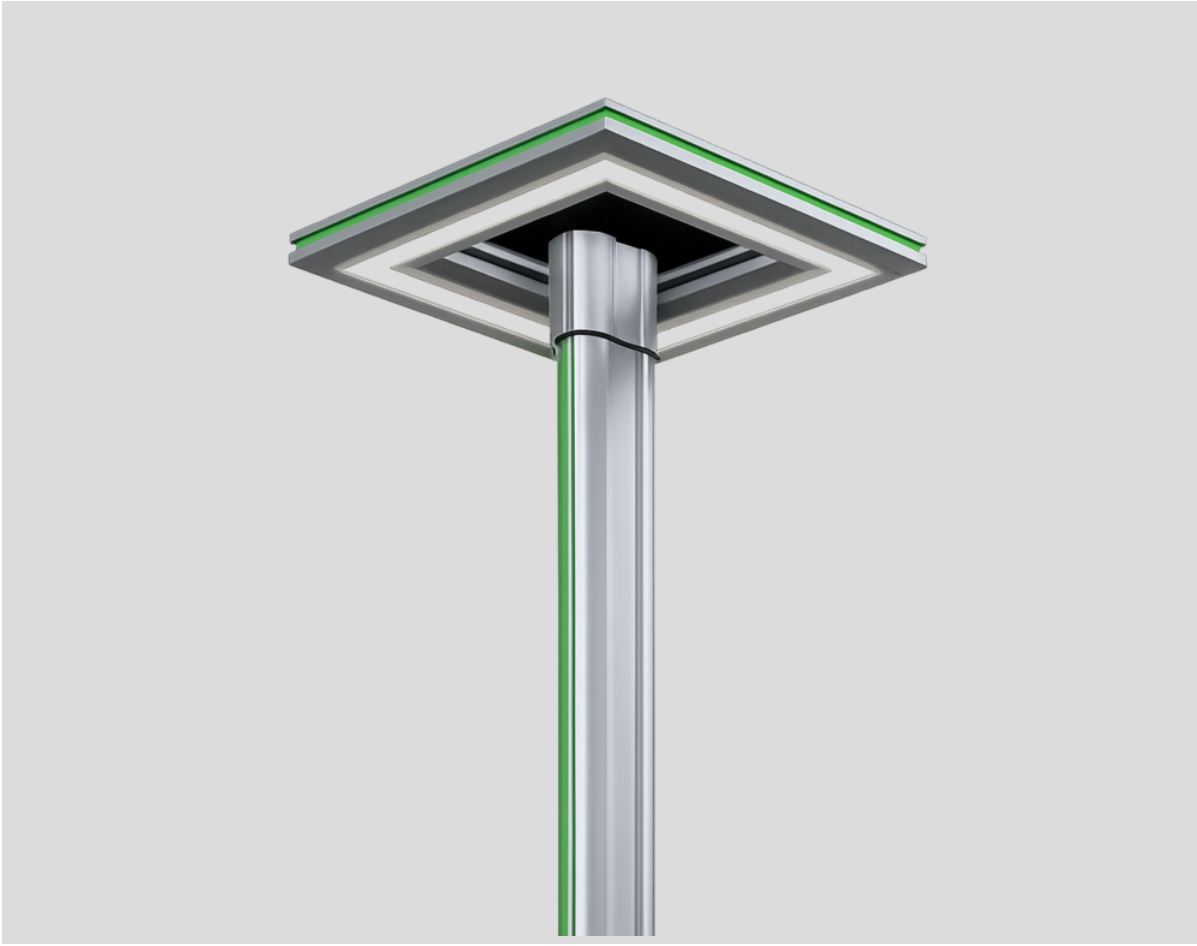

RAL 9016

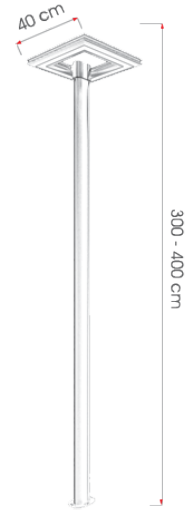

General Information		Electrical Info		Lighting Technology	
Housing	Corrosion Resistant Aluminum Extrusion Body	Power	40-120W	Light Output Angle	60° / 150°
Pole	Corrosion Resistant Galvanized Steel Body	Power Factor	>0.95	UGR Value	UGR ≤ 25
Optics	PMMA Lens + Glass	Light Source	High Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	400(W)x4000(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Mounting Type	Surface	LED Driver	Constant Current		
		Ambient Temperature	-30°C / +60°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	WxH (mm)
09595.44.30.052	40	5100	3000	400x4000
09595.44.40.052	40	5200	4000	400x4000
09595.44.30.078	60	7600	3000	400x4000
09595.44.40.078	60	7800	4000	400x4000
09595.44.30.117	90	11500	3000	400x4000
09595.44.40.117	90	11700	4000	400x4000
09595.44.30.156	120	15500	3000	400x4000
09595.44.40.156	120	15600	4000	400x4000

