
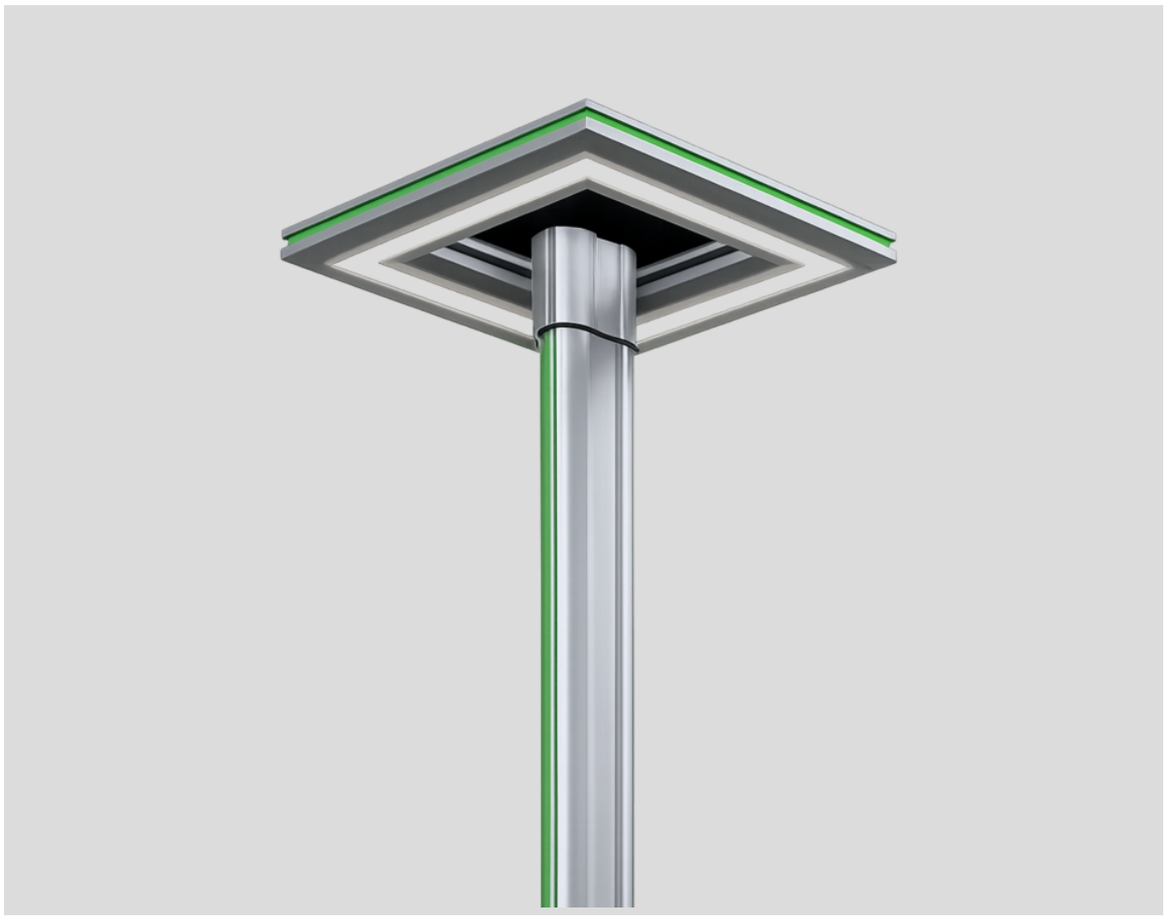


ALFOT-K

09595

RAL 9016

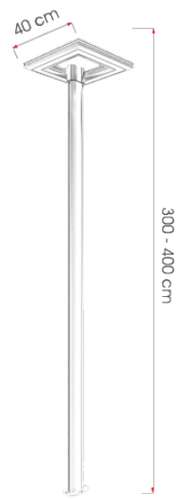

General Information	
Housing	Corrosion Resistant Aluminum Extrusion Body
Pole	Corrosion Resistant Galvanized Steel Body
Optics	PMMA Lens + Glass
Insulation Class	Class I
Product Dimensions [mm]	400(W)x4000(H)
Mounting Type	Surface

Electrical Info	
Power	40-120W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	60° / 150°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional

Order Code	W	Lm	CCT	WxH (mm)
09595.44.30.052	40	5100	3000	400x4000
09595.44.40.052	40	5200	4000	400x4000
09595.44.30.078	60	7600	3000	400x4000
09595.44.40.078	60	7800	4000	400x4000
09595.44.30.117	90	11500	3000	400x4000
09595.44.40.117	90	11700	4000	400x4000
09595.44.30.156	120	15500	3000	400x4000
09595.44.40.156	120	15600	4000	400x4000

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com