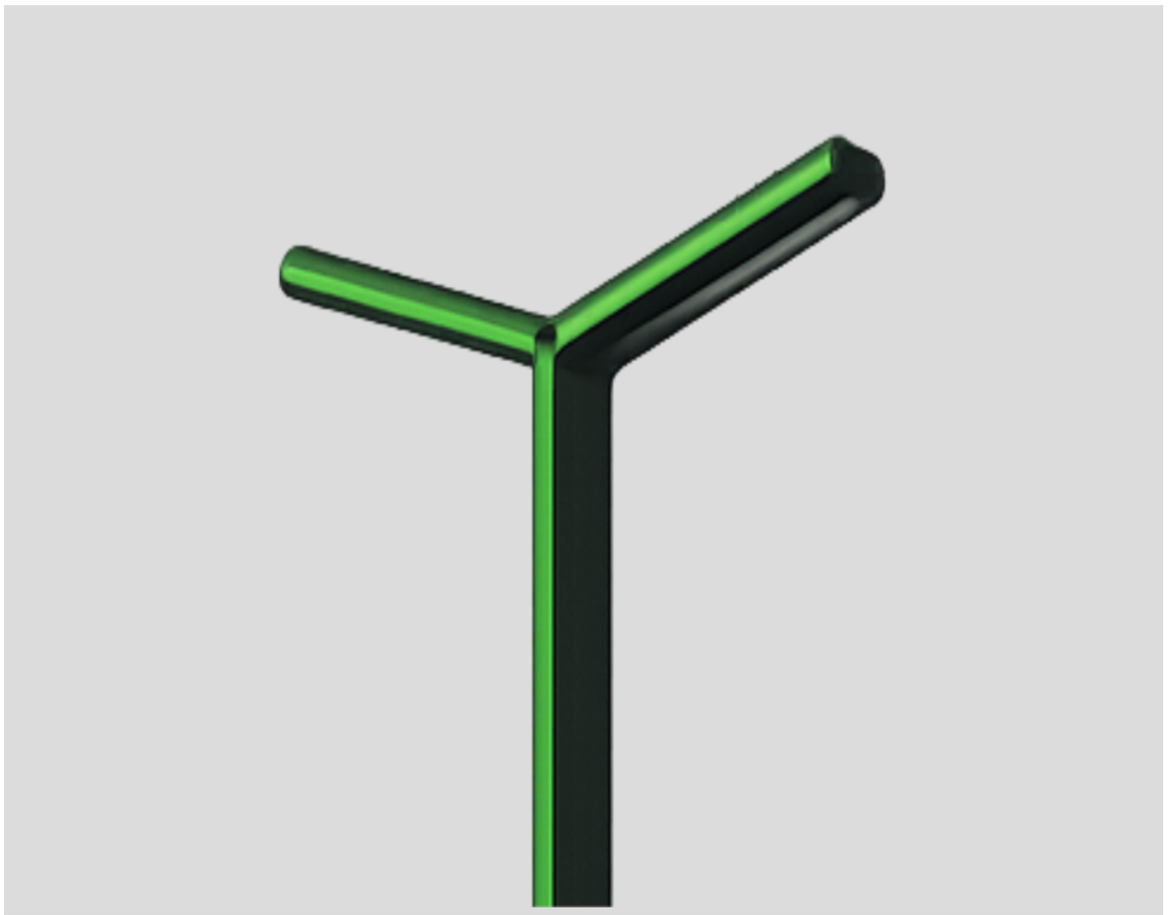



RAL 7016

XPOINT

09591

Modern Design, Maximum Performance

Xpoint is our urban lighting solution developed for parks, walkways, squares, campuses, and landscape areas, with an integrated design that harmonizes with modern city architecture. With a system efficiency of 130 lm/W, it supports energy savings, while offering light distribution suitable for different project needs thanks to its symmetrical and asymmetrical optical options. Its IP65 protection class, IK08 impact resistance, and corrosion-resistant housing ensure long-lasting and reliable use in outdoor conditions, combining aesthetics and functionality.

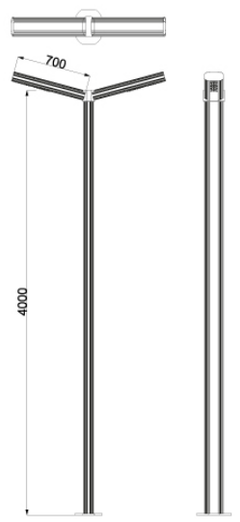

General Information	
Housing	Corrosion Resistant Aluminum Injection
Pole	Corrosion Resistant Galvanized Steel
Optics	PMMA Lens + Glass
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Mounting Type	Surface

Electrical Info	
Power	28-232W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	60° / 150°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White

Order Code	W	Lm	CCT	WxH (mm)
09591.73.30.036	28	3600	3000	700x3200
09591.73.40.036	28	3640	4000	700x3200
09591.73.30.075	58	7500	3000	700x4200
09591.73.40.075	58	7540	4000	700x4200
09591.73.30.110	85	11000	3000	700x5200
09591.73.40.110	85	11500	4000	700x5200
09591.73.30.150	116	15000	3000	700x6200
09591.73.40.150	116	15080	4000	700x6200
09591.13.30.072	2x28	2x3600	3000	1450x3200
09591.13.40.072	2x28	2x3640	4000	1450x3200
09591.13.30.150	2x58	2x7500	3000	1450x4200
09591.13.40.150	2x58	2x7540	4000	1450x4200
09591.13.30.221	2x85	2x11000	3000	1450x5200
09591.13.40.221	2x85	2x11500	4000	1450x5200
09591.13.30.301	2x116	2x15000	3000	1450x6200
09591.13.40.301	2x116	2x15080	4000	1450x6200

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com