



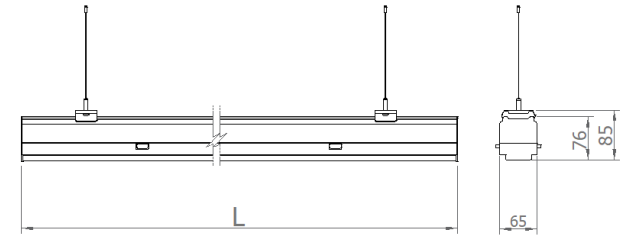

RAL 9016 RAL 9005

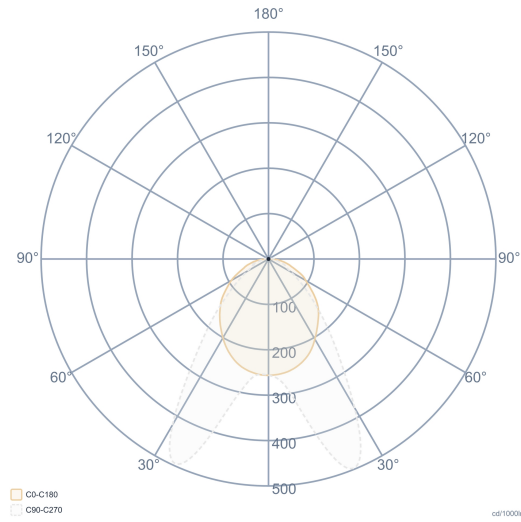

General Information		Electrical Info		Lighting Technology	
Housing	Electrostatic Powder Coated Aluminum	Power	50-76W	Light Output Angle	90° / 60°x90° / 25° / 2x25°
Optics	Optical Lens	Power Factor	>0.95	UGR Value	UGR ≤ 22
Side Cover	PC Injection	Cabling	Halojen-Free	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	65(W)x32(H)	LED Driver	Constant Current	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Kit (1h/3h)	
		Ambient Temperature	-20 °C/+40 °C		
		LED Lifetime L70	>100.000 Hours		

Order Code	W	Lm	CCT	Angle	L (mm)	Kg
07201.11.40.073/90	50	7300	4000	90°	1140	1,20
07201.14.40.100/90	63	10000	4000	90°	1421	1,50
07201.17.40.120/90	76	12000	4000	90°	1702	1,80
07201.11.40.073/60	50	7300	4000	60°x90°	1140	1,20
07201.14.40.100/60	63	10000	4000	60°x90°	1421	1,50
07201.17.40.120/60	76	12000	4000	60°x90°	1702	1,80
07201.11.40.073/AS	50	7300	4000	25°	1140	1,20
07201.14.40.100/AS	63	10000	4000	25°	1421	1,50
07201.17.40.120/AS	76	12000	4000	25°	1702	1,80
07201.11.40.073/AS2	50	7300	4000	2x25°	1140	1,20
07201.11.40.100/AS2	63	10000	4000	2x25°	1421	1,50
07201.11.40.120/AS2	76	12000	4000	2x25°	1702	1,80