





LINEAR

07201

Uninterrupted Power - Flexible Lighting The Linear Lighting Unit is a lighting module developed for continuous lighting systems. By transmitting energy from a single supply point along the line, it offers the advantages of quick installation, low cabling costs, and easy maintenance in long lines. Thanks to its modular structure, the lighting units can be easily placed or replaced where needed. It adapts to different applications with 90° symmetrical, 60x90° symmetrical, 25° asymmetrical, and double 25° asymmetrical light distribution options. It offers energy-efficient performance with system efficiency up to 144 lm/W. It provides quick installation and long-lasting use by creating a continuous lighting infrastructure in warehouses, logistics centers, chain stores, and large industrial areas.



RAL 9016 RAL 9005

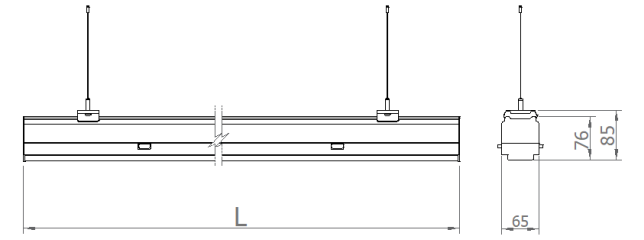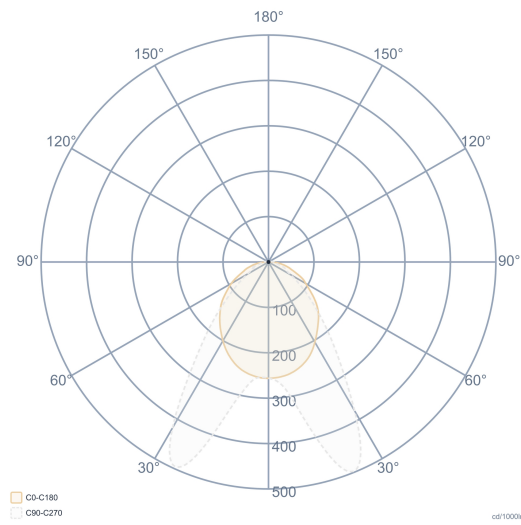

General Information		Electrical Info		Lighting Technology	
Housing	Electrostatic Powder Coated Aluminum	Power	50-76W	Light Output Angle	90° / 60°x90° / 25° / 2x25°
Optics	Optical Lens	Power Factor	>0.95	UGR Value	UGR ≤ 22
Side Cover	PC Injection	Cabling	Halogen-Free	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	65(W)x32(H)	LED Driver	Constant Current	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Kit (1h/3h)	
		Ambient Temperature	-20 °C/+40 °C		
		LED Lifetime L70	>100.000 Hours		

Order Code	W	Lm	CCT	Angle	L (mm)	Kg
------------	---	----	-----	-------	--------	----

