



RAL 9016 RAL 9005

# LINEAR

# 07201

**Uninterrupted Power - Flexible Lighting** The Linear Lighting Unit is a lighting module developed for continuous lighting systems. By transmitting energy from a single supply point along the line, it offers the advantages of quick installation, low cabling costs, and easy maintenance in long lines. Thanks to its modular structure, the lighting units can be easily placed or replaced where needed.
It adapts to different applications with 90° symmetrical, 60x90° symmetrical, 25° asymmetrical, and double 25° asymmetrical light distribution options. It offers energy-efficient performance with system efficiency up to 144 lm/W. It provides quick installation and long-lasting use by creating a continuous lighting infrastructure in warehouses, logistics centers, chain stores, and large industrial areas.

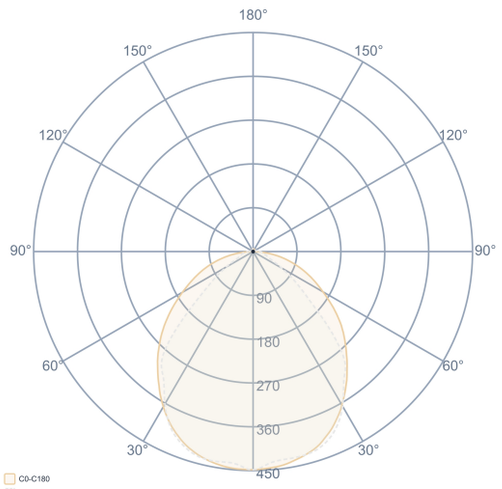

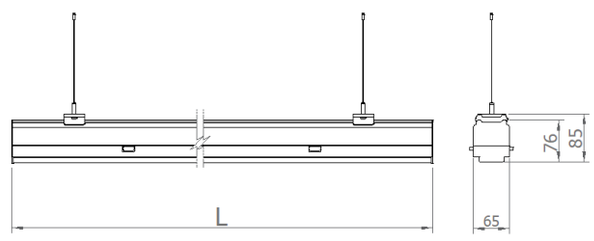
| General Information | |
|---|---|
| **Housing** | Electrostatic Powder Coated Aluminum |
| **Optics** | Optical Lens |
| **Side Cover** | PC Injection |
| **Insulation Class** | Class I |
| **Product Dimensions [mm]** | 65(W)x32(H) |

| Electrical Info | |
|---|---|
| **Power** | 50-76W |
| **Power Factor** | >0.95 |
| **Cabling** | Halojen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | Constant Current |
| **Ambient Temperature** | -20 °C/+40 °C |
| **LED Lifetime L70** | >102.000 Hours |

| Lighting Technology | |
|---|---|
| **Light Output Angle** | 90° / 60°x90° / 25° / 2x25° |
| **UGR Value** | UGR ≤ 22 |
| **CRI [Ra]** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Kit (1h/3h) |

| Order Code | W | Lm | CCT | Angle | L (mm) | Kg |
|---|---|---|---|---|---|---|
| 07201.11.40.073/AS2 | 50 | 7300 | 4000 | AS/2x25° | 1140 | 1,20 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com