

RAL 9016 RAL 9005

RUNNING


07200

System Integrity - Design Continuity

Running Blind Cover is a complementary module developed to protect system integrity in uninterrupted lighting (trunking) systems where the lighting unit is not used. It maintains the uninterrupted and aesthetic appearance of the line by being mounted on the energy carrier unit.

Thanks to its structure that does not contain LEDs and optical lenses, lighting is used only at the points where it is needed, while maintaining the same profile form in other parts, creating a regular and holistic line. Thanks to its modular structure, it can be easily installed and provides system flexibility by replacing it with lighting units when necessary. It is the ideal solution that completes the architectural integrity of trunking systems in warehouses, logistics centers, production facilities, markets and large commercial areas.

IP 40 IK 08

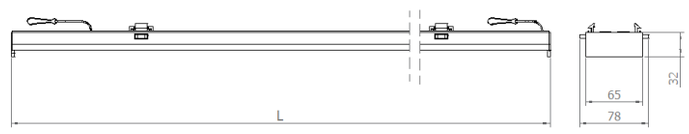

General Information	
Housing	Aluminum Profile
Side Cover	PC Enjeksion
Product Dimensions [mm]	65(W) x 32(H)
Mounting Type	Surface and Pendant
Mounting Part	Stainless Spring Steel

Electrical Info

Lighting Technology

Optional

Order Code	L (mm)
07200.000.000.010	1144
07200.000.000.008	1430
07200.000.000.011	1715
07200.000.000.009	2000

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com