


RAL 7016


HIGHLINE-F IP65

07309

Highbay Lighting Fixture

Highline-F with its double aluminum extrusion profile structure and optical system, is designed for industrial areas with ceiling heights of 4-12 m. Its slim linear design gives industrial spaces a modern and architectural look. The most striking feature of the product is that the outer casing and the inner cooling profile, which carries the electrical components, are designed independently. When the side covers are opened, the inner profile can be easily removed, providing quick access to the LED, lens, and driver components. This modular structure simplifies maintenance and servicing, while significantly reducing operating costs throughout the luminaire's lifespan. Different optical lens options allow for the creation of optimal lighting solutions for various ceiling heights, racking systems, and application scenarios.

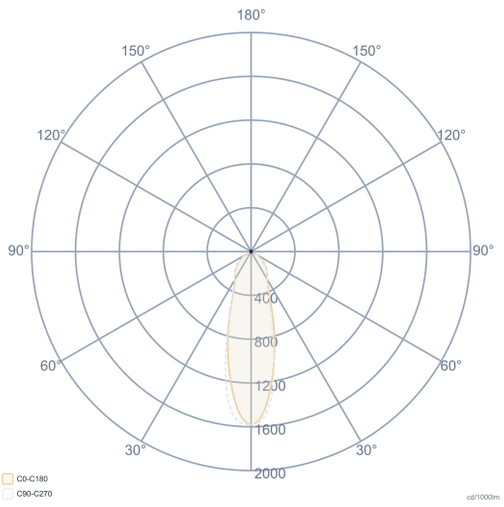

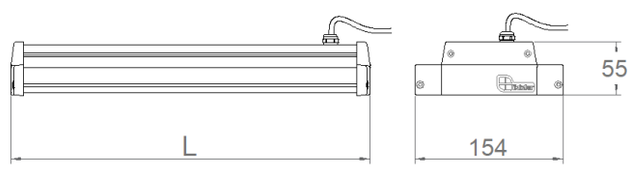

General Information	
Housing	Aluminum Extruded
Side Cover	PC Injection + Silicone Gasket
Optics	UV Stabilized Lens + Heat Resistant Tempered Clear Glass
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	154(W) x L x 55(H)
Mounting Type	Surface and Pendant
Mounting Part	Steel Console

Electrical Info	
Power	65-250W
Power Factor	>0.95
Light Source	Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Saat

Lighting Technology	
Light Output Angle	30°-60°-90°-20x100°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
Emergency Lighting Unit
CRI>90 , 2700K~6500K , Tunable White
Wire Cage
Safety Filmed Glass

Order Code	W	Lm	Angle	Productivity	CCT	L (mm)	Kg
07309.04.40.105-30	65	10000	30°	152 Lm/W	4000	400	2,60
07309.04.40.105-60	65	10450	60°	160 Lm/W	4000	400	2,60
07309.04.40.105-90	65	10400	90°	160 Lm/W	4000	400	2,60
07309.04.40.105-AS	65	10100	20x100°	154 Lm/W	4000	400	2,60
07309.05.40.151-30	105	16000	30°	152 Lm/W	4000	450	2,80
07309.05.40.151-60	105	16900	60°	160 Lm/W	4000	450	2,80
07309.05.40.151-90	105	16800	90°	160 Lm/W	4000	450	2,80
07309.05.40.151-AS	105	16200	20x100°	154 Lm/W	4000	450	2,80
07309.06.40.200-30	134	20400	30°	152 Lm/W	4000	600	3,00
07309.06.40.200-60	134	21500	60°	160 Lm/W	4000	600	3,00
07309.06.40.200-90	134	21450	90°	160 Lm/W	4000	600	3,00
07309.06.40.200-AS	134	20650	20x100°	154 Lm/W	4000	600	3,00
07309.07.40.280-30	190	28900	30°	152 Lm/W	4000	755	3,00
07309.07.40.280-60	190	30400	60°	160 Lm/W	4000	755	3,00
07309.07.40.280-90	190	30350	90°	160 Lm/W	4000	755	3,00
07309.07.40.280-AS	190	29300	20x100°	154 Lm/W	4000	755	3,00
07309.08.40.320-30	210	31920	30°	152 Lm/W	4000	855	4,00
07309.08.40.320-60	210	33840	60°	160 Lm/W	4000	855	4,00
07309.08.40.320-90	210	33660	90°	160 Lm/W	4000	855	4,00

07309.08.40.320-AS	210	32350	20x100°	154 Lm/W	4000	855	4,00
07309.12.40.400-30	250	40750	30°	163 Lm/W	4000	1205	4,50
07309.12.40.400-60	250	42600	60°	170 Lm/W	4000	1205	4,50
07309.12.40.400-90	250	42500	90°	170 Lm/W	4000	1205	4,50
07309.12.40.400-AS	250	41250	20x100°	165 Lm/W	4000	1205	4,50

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com