



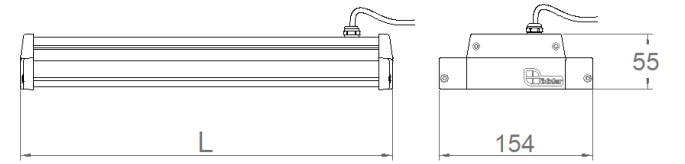

RAL 7016

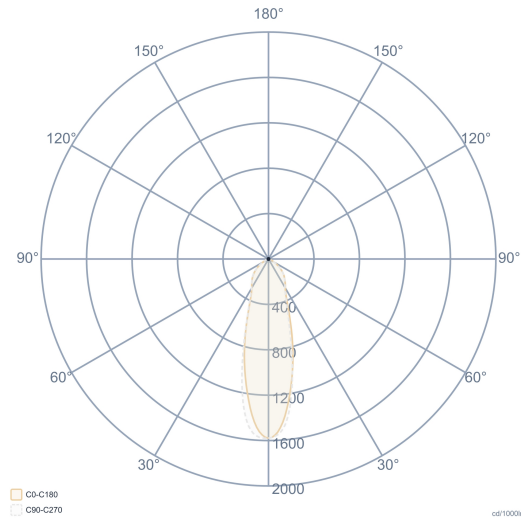

| General Information     |                                                          | Electrical Info     |                        | Lighting Technology                                                                                                                 |                     |
|-------------------------|----------------------------------------------------------|---------------------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| Housing                 | Aluminum Extruded                                        | Power               | 65-250W                | Light Output Angle                                                                                                                  | 30°-60°-90°-20x100° |
| Side Cover              | PC Injection + Silicone Gasket                           | Power Factor        | >0.95                  | UGR Value                                                                                                                           | UGR ≤ 22            |
| Optics                  | UV Stabilized Lens + Heat Resistant Tempered Clear Glass | Light Source        | Power LED              | CRI [Ra]                                                                                                                            | CRI ≥ 80            |
|                         |                                                          | Cabling             | Halojen-Free           | Color Bin Value                                                                                                                     | Mc Adams ≤ 3        |
| Paint                   | Electrostatic Powder Paint                               | Input Voltage       | 220-240V AC / 50-60 Hz | Optional<br><br>DALI / 1-10V<br>Emergency Lighting Unit<br>CRI>90 , 2700K~6500K , Tunable White<br>Wire Cage<br>Safety Filmed Glass |                     |
| Insulation Class        | Class I                                                  | LED Driver          | Constant Current       |                                                                                                                                     |                     |
| Product Dimensions [mm] | 154(W) x L x 55(H)                                       | Ambient Temperature | -20°C / +50°C          |                                                                                                                                     |                     |
|                         |                                                          | LED Lifetime L70    | >50.000 Saat           |                                                                                                                                     |                     |
| Mounting Type           | Surface and Pendant                                      |                     |                        |                                                                                                                                     |                     |
| Mounting Part           | Steel Console                                            |                     |                        |                                                                                                                                     |                     |

| Order Code         | W   | Lm    | Angle | Productivity | CCT  | L (mm) | Kg   |
|--------------------|-----|-------|-------|--------------|------|--------|------|
| 07309.08.40.320-60 | 210 | 33840 | 60°   | 160 Lm/W     | 4000 | 855    | 4,00 |

