



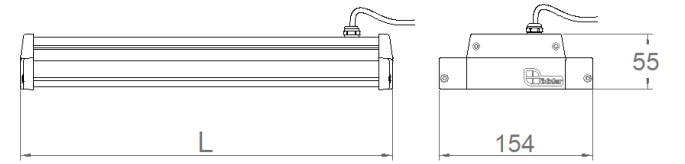

RAL 7016

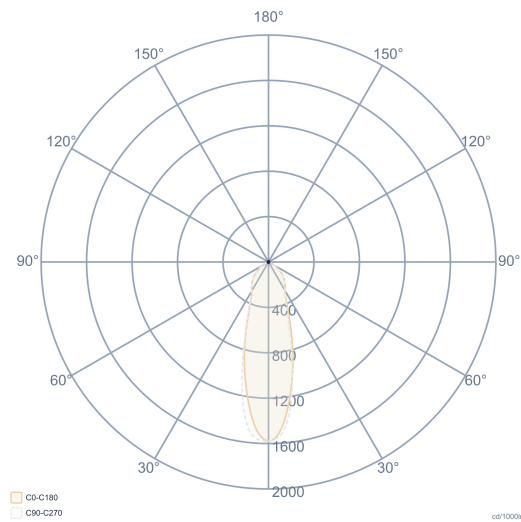

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	65-250W	Light Output Angle	30°-60°-90°-20x100°
Side Cover	PC Injection + Silicone Gasket	Power Factor	>0.95	UGR Value	UGR ≤ 22
Optics	UV Stabilized Lens + Heat Resistant Tempered Clear Glass	Light Source	Power LED	CRI [Ra]	CRI ≥ 80
		Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Paint	Electrostatic Powder Paint	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V Emergency Lighting Unit CRI>90 , 2700K~6500K , Tunable White Wire Cage Safety Filmed Glass	
Insulation Class	Class I	LED Driver	Constant Current		
Product Dimensions [mm]	154(W) x L x 55(H)	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Saat		
Mounting Type	Surface and Pendant				
Mounting Part	Steel Console				

Order Code	W	Lm	Angle	Productivity	CCT	L (mm)	Kg
07309.12.40.400-AS	250	41250	20x100°	165 Lm/W	4000	1205	4,50

