


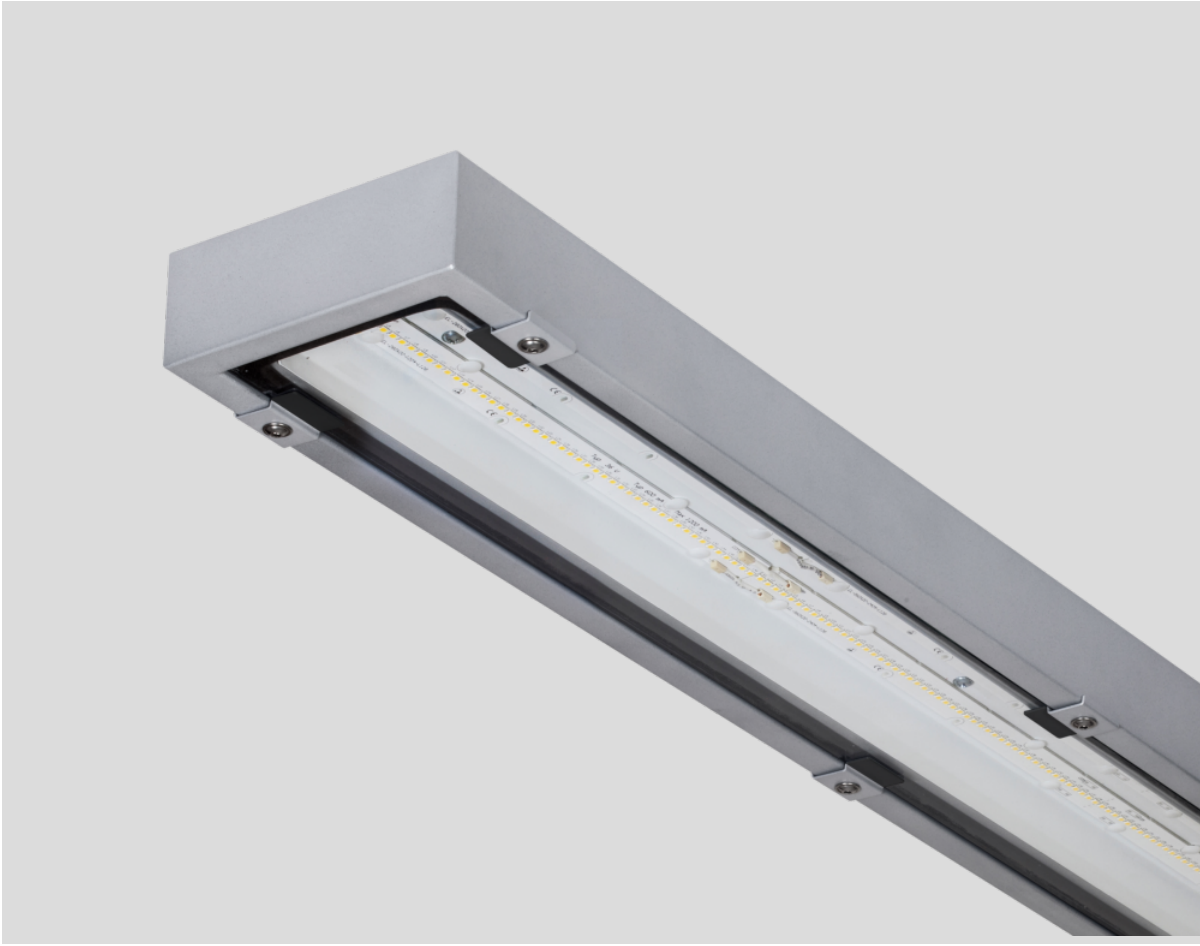



RISING

07301

Industrial High Bay Luminaire with Metal Sheet Body

Rising is designed for industrial areas with its metal sheet housing and simple design. Thanks to its lensless optical structure, it offers a homogeneous and wide-angle light distribution. It provides efficient general lighting in production facilities, warehouses, logistics centers, and large-volume buildings.

Thanks to its metal sheet construction, it can be produced in standard sizes as well as custom sizes for specific projects. With various power, color temperature, and control options, it adapts to project-specific lighting scenarios. Its economical structure, production flexibility, and reliable performance make it an ideal solution for functional industrial lighting needs.

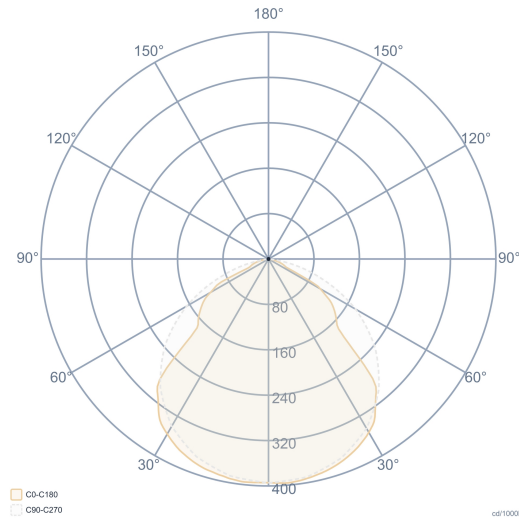

General Information		Electrical Info		Lighting Technology	
Housing	DKP Metal Sheet	Power	90-120W	Optics	Symmetrical
Glass	Tempered Clear Glass	Power Factor	>0.95	Light Output Angle	100°
Insulation Class	Class I	Light Source	SMD Mid Power LED	UGR Value	UGR ≤ 22
Product Dimensions [mm]	138(W)x50(L)x920(H)	Cabling	Halogen-Free	CRI [Ra]	CRI ≥ 80
		Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
Mounting Type	Surface and Pendant	LED Driver	Constant Current	Optional	
Mounting Part	Steel Concole	Ambient Temperature	-20°C / +40°C		
		LED Lifetime L70	>50.000 Hour		
				DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Lm	CCT	WxHxL (mm)	Kg
07301.15.40.120	90	12150	4000	138x50x920	4,00
07301.15.65.120	90	11970	6500	138x50x920	4,00
07301.15.40.160	120	16080	4000	138x50x1200	5,00
07301.15.65.160	120	15960	6500	138x50x1200	5,00

