

# Drax Batwing

Indoor Lighting - Waterproof



Colour Options



Ral 9006

## TECHNICAL INFORMATION

**Housing** CO-EX Extrusion PC Profile  
**Side Cover** PC Injection + Silicone Gasket  
**Diffuser** Batwing Lens + PC Opal

## OPTICAL SPECIFICATIONS

**Optics** High Efficiency Batwing Lens  
**Light Output Angle** 165°x130°  
**UGR Value** UGR ≤ 22  
**CRI** CRI ≥ 80  
**Color Bin Value** Mc Adams ≤ 3

## ELECTRICAL



**Power (W)** 21-54W  
**Power Factor** >0.95  
**Light Source** Mid Power LED  
**Cabling** Halojen-Free  
**Input Voltage** 220-240V AC / 50-60 Hz  
**LED Driver** High Efficiency Constant Current Output  
**Ambient Temperature** -20°C / +50°C  
**LED Lifetime L80B50** >50.000 Hour

## OPTIONAL

- DALI - 1-10V DIM  
- DC Operation Mode - Emergency Lighting Unit  
- CRI > 90 - 2700K ~ 6500K  
- Class-II Protection Class - PIR Sensor

## ASSEMBLY

**Installation Type** Surface Mounted  
**Mounting Apparatus** Metal Bracket

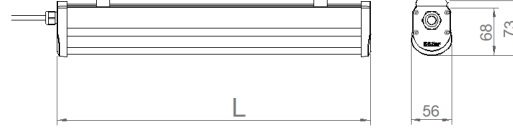

Order Code	W	Lm	Angle	CCT	CRI	L (mm)	Kg
07110.08.40.031	32	3840	165°-130°	4000K	Ra>80	860	0,7

