

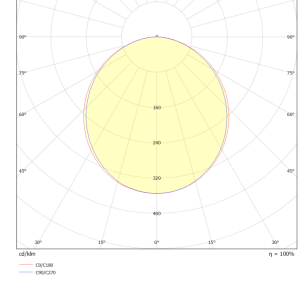


Waterline-100 IP65

Indoor Lighting - Linear Lighting, Recessed Lighting, Waterproof

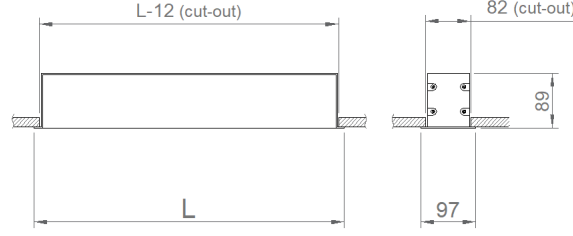

Colour Options



Ral 9016

Ral 9006

Ral 9005

TECHNICAL INFORMATION

| | |
|-----------------------|-------------------------------|
| Housing | Extruded Aluminum Profile |
| Side Cover | Aluminum Injection |
| Diffuser | High Light Transmittance Opal |
| Paint | Electrostatic Powder Paint |
| Dimensions(mm) | 97(W) x 90(H) |

OPTICAL SPECIFICATIONS

| | |
|---------------------------|--------------|
| Optics | Symmetrical |
| Light Output Angle | 110° |
| UGR Value | UGR ≤ 22 |
| CRI | CRI ≥ 80 |
| Color Bin Value | Mc Adams ≤ 3 |

ELECTRICAL

| | |
|----------------------------|---|
| Power (W) | 18-65W |
| Power Factor | >0.95 |
| Light Source | SMD Mid Power LED |
| Cabling | Halojen-Free |
| Input Voltage | 220-240V AC / 50-60 Hz |
| LED Driver | High Efficiency Constant Current Output |
| Ambient Temperature | -20°C / +50°C |
| LED Lifetime L80B50 | >50.000 Saat |

OPTIONAL

| | |
|-------------------------------|----------------------------------|
| - DALI | - 1-10V DIM |
| - Tunable White | - Emergency Lighting Unit |
| - CRI > 90 | - 2700K ~ 6500K |
| - Different RAL Color Options | - Plug-in Energy Input Connector |
| - Class-II Protection Class | - PIR Sensor |
| - AC-DC Supply(MBS) | |

ASSEMBLY

Installation Type Under Plaster

| Order Code | W | Lm | CCT | CRI | WxHxL (mm) | Kg |
|-----------------|----|------|------|-------|------------|-----|
| 02156.99.40.020 | 18 | 2000 | 4000 | Ra>80 | 97x90x605 | 1,7 |

