

Voltar

Indoor Lighting - Industrial Lighting



Colour Options



Rat 9005

TECHNICAL INFORMATION

Housing	Aluminum Injection
Optics	Adjustable Angle Clear Optic Lens
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	60°, 90°, 110°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL





Power (W)	100-200W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Emergency Lighting Unit	- CRI > 90
- 2700K ~ 6500K	- Different color options
- Plug-in Connector	- Class-I Protection Class
- PIR Sensor	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Surface Mounted, Pendant

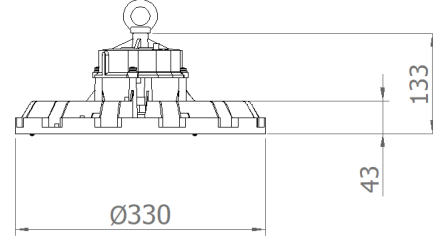

Order Code	W	Lm	CCT	Productivity	Angle	(Ø) (mm)	Kg
------------	---	----	-----	--------------	-------	------------	----

