

Titan-M

Outdoor Lighting - Projector



Colour Options



Ral 7016

TECHNICAL INFORMATION

Housing	Aluminum Injection
Glass	Tempered Clear Glass
Optics	PMMA Optical Lens
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Light Distribution	Symmetric - Asymmetric
UGR Value	UGR $\leq$ 22
CRI	CRI $\geq$ 70
Color Bin Value	Mc Adams $\leq$ 3

ELECTRICAL




Power (W)	100-150W
Power Factor	>0.95
Light Source	SMD High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-40°C / +40°C
LED Lifetime L80B50	100.000 Hours

OPTIONAL

DALI
1-10V DIM
SPD
Plug-in Connector
Class-I Protection Class

ASSEMBLY

Installation Type Surface Mounted
Mounting Apparatus Metal Console

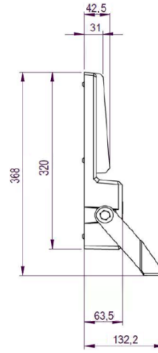

Order Code	W	Lm	Productivity	CCT	CRI	WxLxH (mm)	Kg
09245.32.40.140	100	14000	140 lm/W	4000	Ra>70	386x320x63	4,4

