


Sinus

Indoor Lighting - Cove Lighting



Colour Options

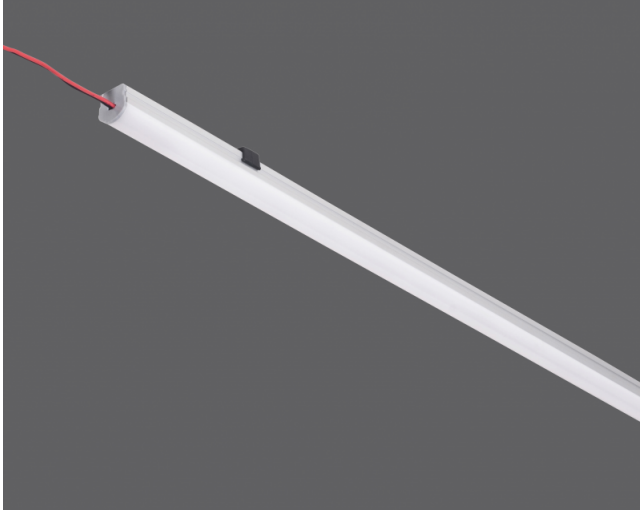

Ral 9006

TECHNICAL INFORMATION

Housing	Anodized aluminum profile
Diffuser	Extrusion Diffuser
Paint	Anodized Coating

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	1.4-21W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	24V DC
LED Driver	High Efficiency Constant Voltage Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Plug-in Energy Input Connector	- Class-II Protection Class

ASSEMBLY

Installation Type	Surface Mounted
Mounting Apparatus	Metal Bracket

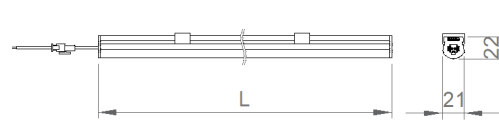

Order Code	W/m	Lm	CCT	CRI	WxHxL (mm)	Kg
06132.22.30.023	1.4	140	3000	Ra>80	21x18x115	0,05
06132.22.40.001	1.4	150	4000	Ra>80	21x18x115	0,05
06132.22.30.024	2	280	3000	Ra>80	21x18x215	0,08
06132.22.40.024	2	300	4000	Ra>80	21x18x215	0,08
06132.22.30.021	7	710	3000	Ra>80	21x18x515	0,15
06132.22.40.007	7	755	4000	Ra>80	21x18x515	0,15
06132.22.30.010	14	1020	3000	Ra>80	21x18x1015	0,25
06132.22.40.010	14	1040	4000	Ra>80	21x18x1015	0,25
06132.22.30.012	17	1710	3000	Ra>80	21x18x1215	0,33
06132.22.40.020	17	1810	4000	Ra>80	21x18x1215	0,33
06132.22.30.015	21	2140	3000	Ra>80	21x18x1515	0,38
06132.22.40.022	21	2260	4000	Ra>80	21x18x1515	0,38



Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K. Katalogta ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir. İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

