Sinus

Indoor Lighting - Cove Lighting

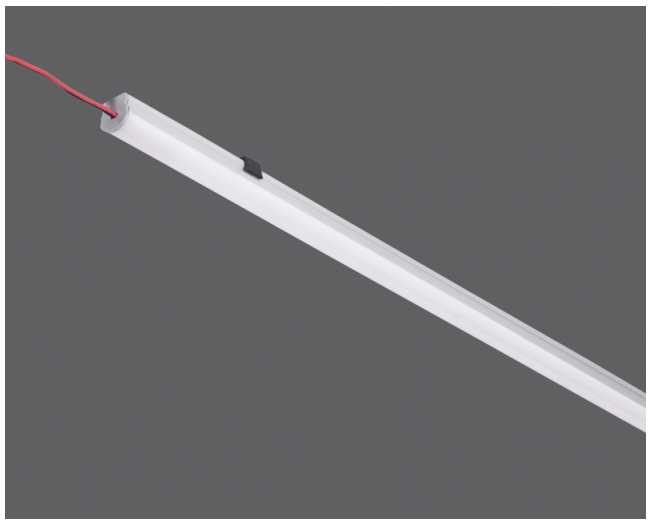

Colour Options Ral 9016 | Ral 9006 | Ral 9005

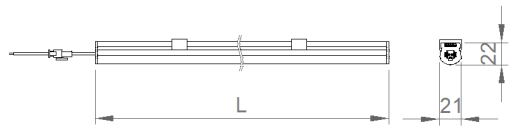



Order Code	W/m	Lm	CCT	CRI	WxLxH (mm)	Kg
06132.22.30.023	1.4	140	3000	Ra>80	21x115x18	0,05

TECHNICAL INFORMATION

Housing Anodized aluminum profile
Diffuser Extrusion Diffuser
Paint Anodized Coating

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL

Power (W) 1.4-21W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Voltage Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Surface Mounted
Mounting Apparatus Metal Bracket

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com