


Sinus

Indoor Lighting - Cove Lighting



Colour Options

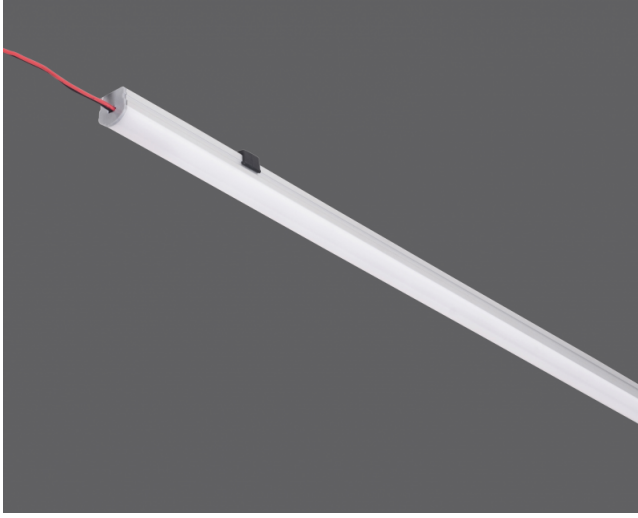

Ral 9006

TECHNICAL INFORMATION

Housing Anodized aluminum profile
Diffuser Extrusion Diffuser
Paint Anodized Coating

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 1.4-21W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Voltage Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Surface Mounted
Mounting Apparatus Metal Bracket

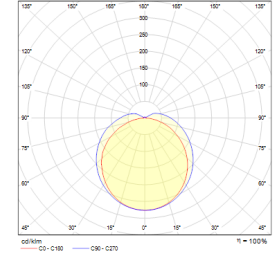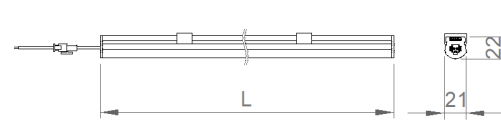

Order Code	W/m	Lm	CCT	CRI	WxHxL (mm)	Kg
06132.22.40.007	7	755	4000	Ra>80	21x18x515	0,15

