
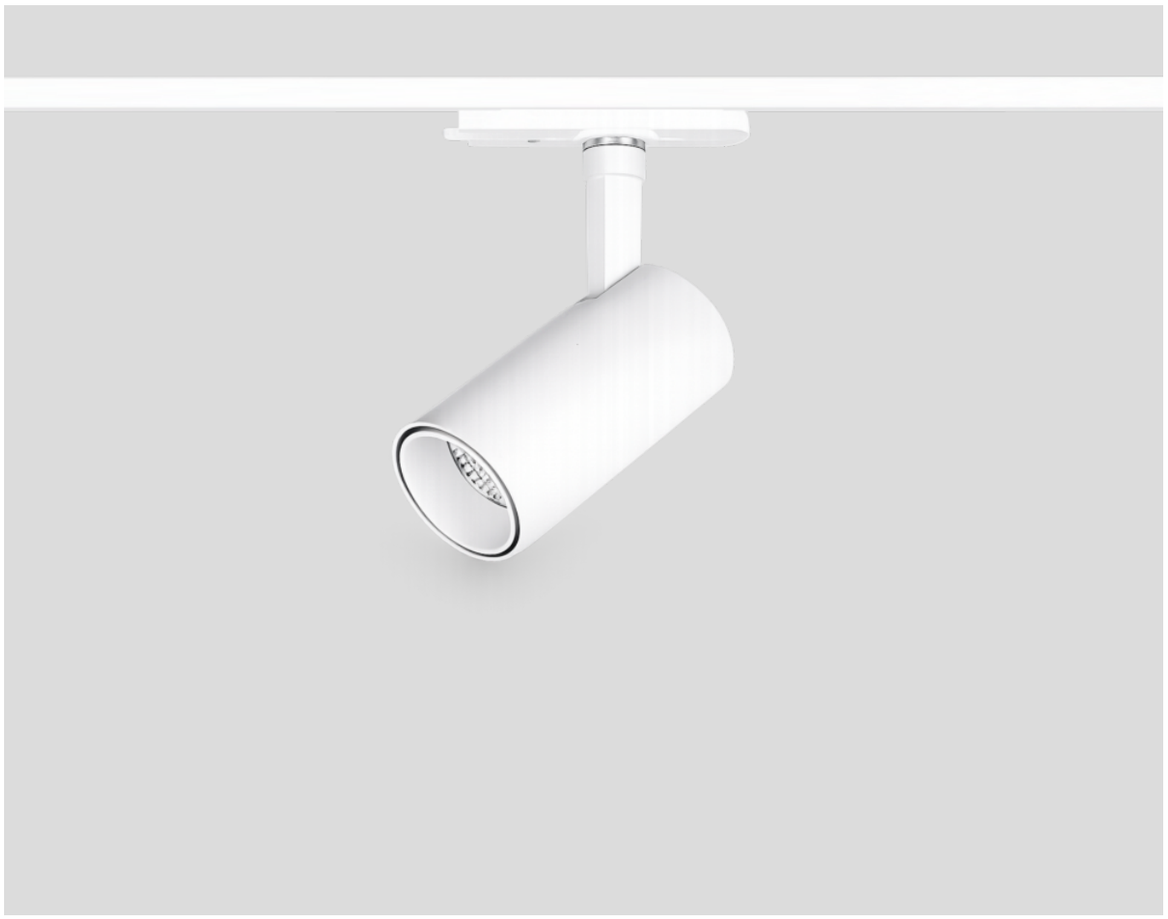



RAL 9016 RAL 9005


DAYSTAR-M

05638

Adjustable Mini Track Spot Luminaire DAYSTAR-M is a track spotlight developed for professional accent lighting, featuring a track socket design, adjustable housing, and low-glare optical system. Its flexible usage allows for effective lighting in a wide range of architectural projects, from shops and galleries to offices and exhibition spaces. Its 90° tilt and 350° rotation capability allows for directing light to the desired point. Powered by the track system, its position can be adjusted along the track without requiring changes to the electrical installation. It offers flexibility for varying spatial arrangements and display scenarios. With 18°-24°-38° optical angle options, it provides solutions for narrow-angle accent lighting and wider area illumination. UGR≤18 enhances visual comfort, and CRI 90 ensures natural and realistic color perception, offering a superior lighting experience in retail, museums, and display areas.

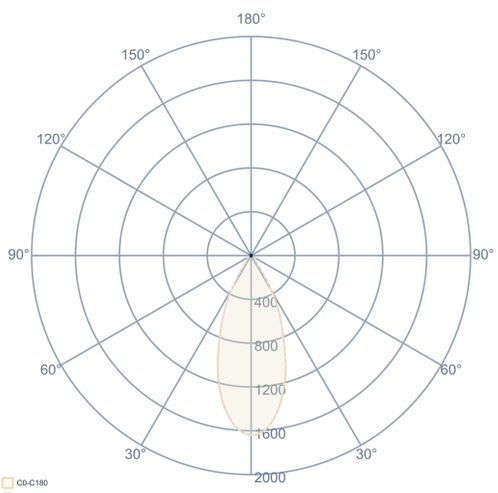





General Information	
Housing	Aluminum Injection
Frame	Aluminum Injection
Optics	Metallized Surface Optics
Paint	Electrostatic Powder Coating
Insulation Class	Class II
Product Dimensions [mm]	Ø65(D)x130(L)
Mounting Type	Rail Socket
Mounting Part	Rail Socket

Electrical Info	
Power	9-18W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	38°
UGR Value	UGR ≤ 16
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
Tunable White
CRI>90 , 2700K~6500K , Tunable White
2700K ~ 6500K

Order Code	W	Angle	Lm	CCT	ØD x H (mm)	Kg
05638.60.30.008	9	38º	970	3000	Ø65x130	0,54
05638.60.40.009	9	38º	1040	4000	Ø65x130	0,54
05638.60.30.014	18	38º	1890	3000	Ø65x130	0,54
05638.60.40.015	18	38º	1990	4000	Ø65x130	0,54

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com