


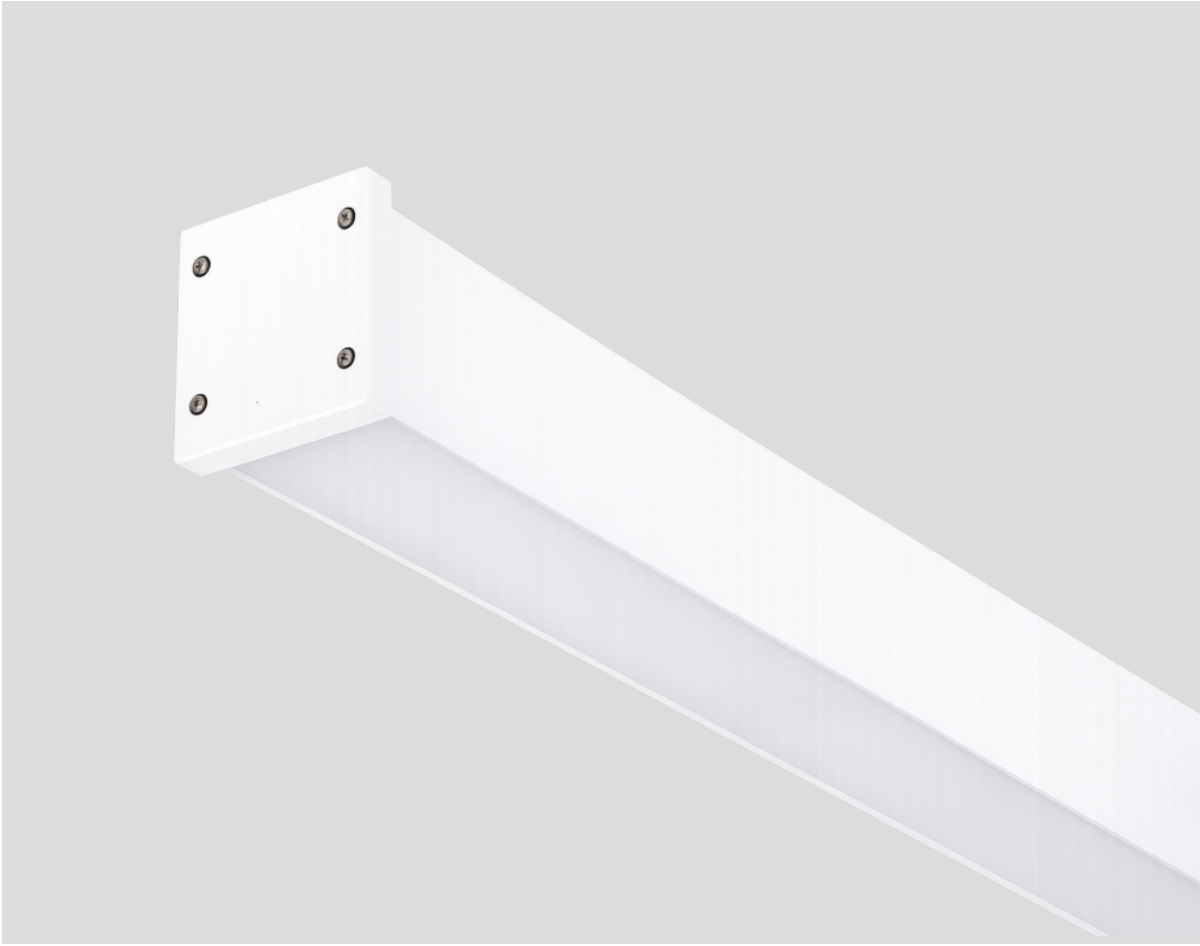


WATERLINE 080-IP65

01194

IP65 Industrial Lighting Luminaire

Waterline 080 Series is a durable lighting solution developed for demanding environments, featuring IP65 and IK10. Its aluminum body and cover construction provide high mechanical strength and long-lasting performance. The specially designed diffuser with an integrated silicone gasket ensures reliable protection against dust and moisture, enabling the luminaire to achieve its IP65 protection rating. At the same time, it delivers uniform and comfortable illumination, enhancing visual comfort.

Metro stations, high-speed rail platforms, tunnels, pedestrian underpasses, parking facilities and industrial environments. With different lengths, color temperature options and control alternatives, it can be adapted to project-specific requirements.

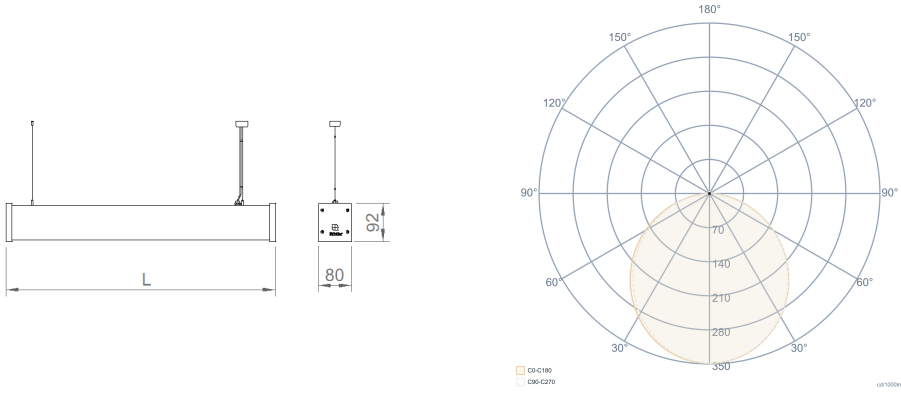

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	18W-65W	Light Output Angle	110°
Side Cover	Aluminum Injection	Power Factor	>0.95	UGR Value	UGR ≤ 22
Diffuser	Silicone Sealed Extruded PC	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Product Dimensions [mm]	80(W) x 92(H)	LED Driver	Constant Current		DALI / 1-10V
Mounting Type	Surface and Pendant	Ambient Temperature	-20°C / +50°C		CRI>90 , 2700K~6500K , Tunable White
Mounting Part	Height Adjustable Steel Spring + Wire	LED Lifetime L70	>50.000 Saat		Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
01194.89.30.069	65	7000	3000	80x92x1995	4,80

