
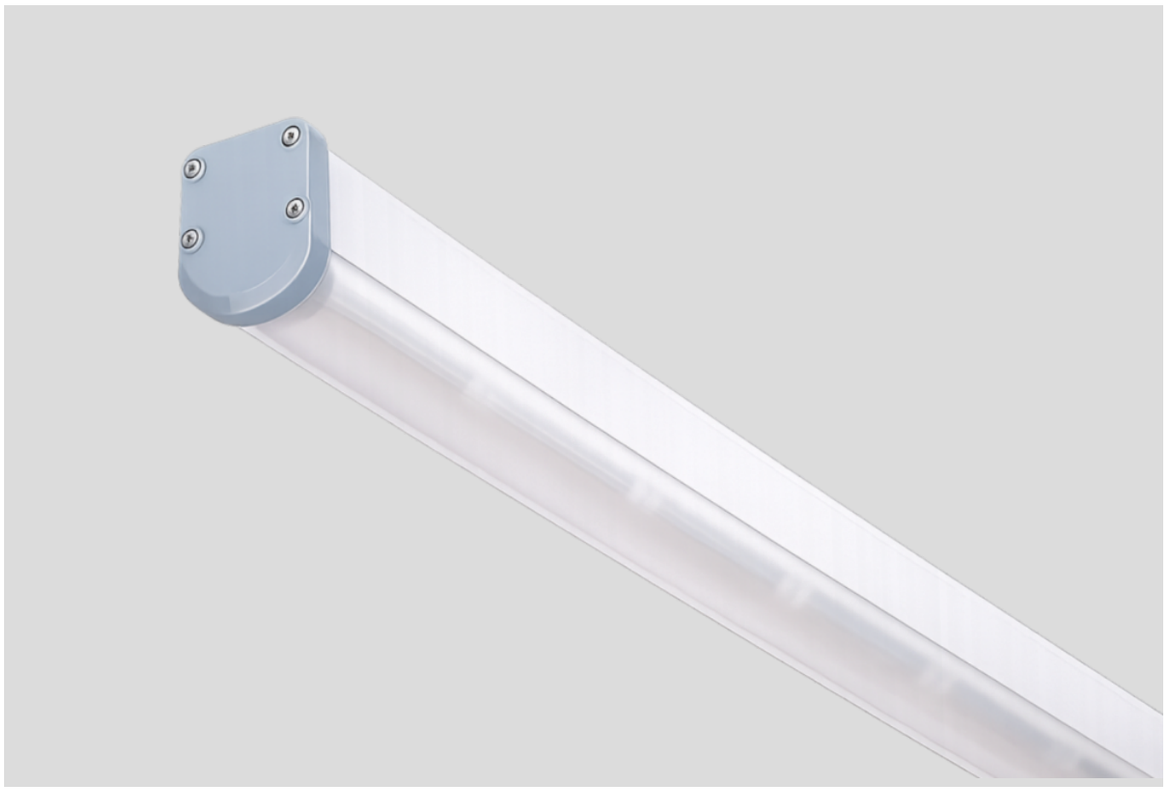



RAL 9006

# DRAX Batwing

## 07110

**Lightweight and Durable Waterproof Lighting** Drax is designed to enhance vertical illumination performance through its specialized batwing optical structure. It offers reliable operation in dusty and humid environments thanks to its co-extruded (CO-EX) polycarbonate body, silicone-gasketed end caps, and IP65 protection rating.
With its wide 165°x130° light distribution, it effectively directs light not only to the floor but also to shelf surfaces and vertical areas. This enables more uniform lighting in warehouse aisles, parking garages, logistics centers, and high-bay storage facilities, while also allowing for a reduction in the total number of fixtures required.

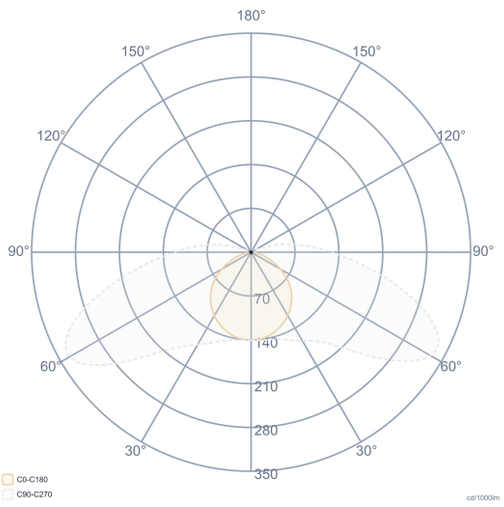

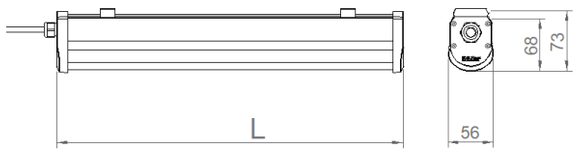
| General Information | |
|---|---|
| **Housing** | CO-EX Extrusion PC Profile |
| **Side Cover** | PC Injection + Silicone Gasket |
| **Diffuser** | Batwing Acrylic Lens + PC Opal |
| **Inner plate** | Aluminum Extrusion |
| **Insulation Class** | Class I |
| **Product Dimensions [mm]** | 56(W) x 68(H) |

| Electrical Info | |
|---|---|
| **Power** | 21-54W |
| **Power Factor** | >0.95 |
| **Light Source** | Mid Power LED |
| **Cabling** | Halogen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | Constant Current |
| **Ambient Temperature** | -20°C / +50°C |
| **LED Lifetime L70** | >102.000 Hour |

| Lighting Technology | |
|---|---|
| **Light Output Angle** | 165°x130° |
| **UGR Value** | UGR ≤ 22 |
| **CRI [Ra]** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Lighting Unit |

| Order Code | W | Lm | Angle | CCT | L (mm) | Kg |
|---|---|---|---|---|---|---|
| 07110.06.30.021 | 21 | 2460 | 165°-130° | 3000 | 580 | 0,50 |
| 07110.06.40.022 | 21 | 2520 | 165°-130° | 4000 | 580 | 0,50 |
| 07110.08.30.030 | 32 | 3750 | 165°-130° | 3000 | 860 | 0,70 |
| 07110.08.40.031 | 32 | 3840 | 165°-130° | 4000 | 860 | 0,70 |
| 07110.12.30.042 | 43 | 5050 | 165°-130° | 3000 | 1140 | 1,00 |
| 07110.12.40.043 | 43 | 5160 | 165°-130° | 4000 | 1140 | 1,00 |
| 07110.14.30.063 | 54 | 6350 | 165°-130° | 3000 | 1420 | 1,20 |
| 07110.14.40.064 | 54 | 6480 | 165°-130° | 4000 | 1420 | 1,20 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com