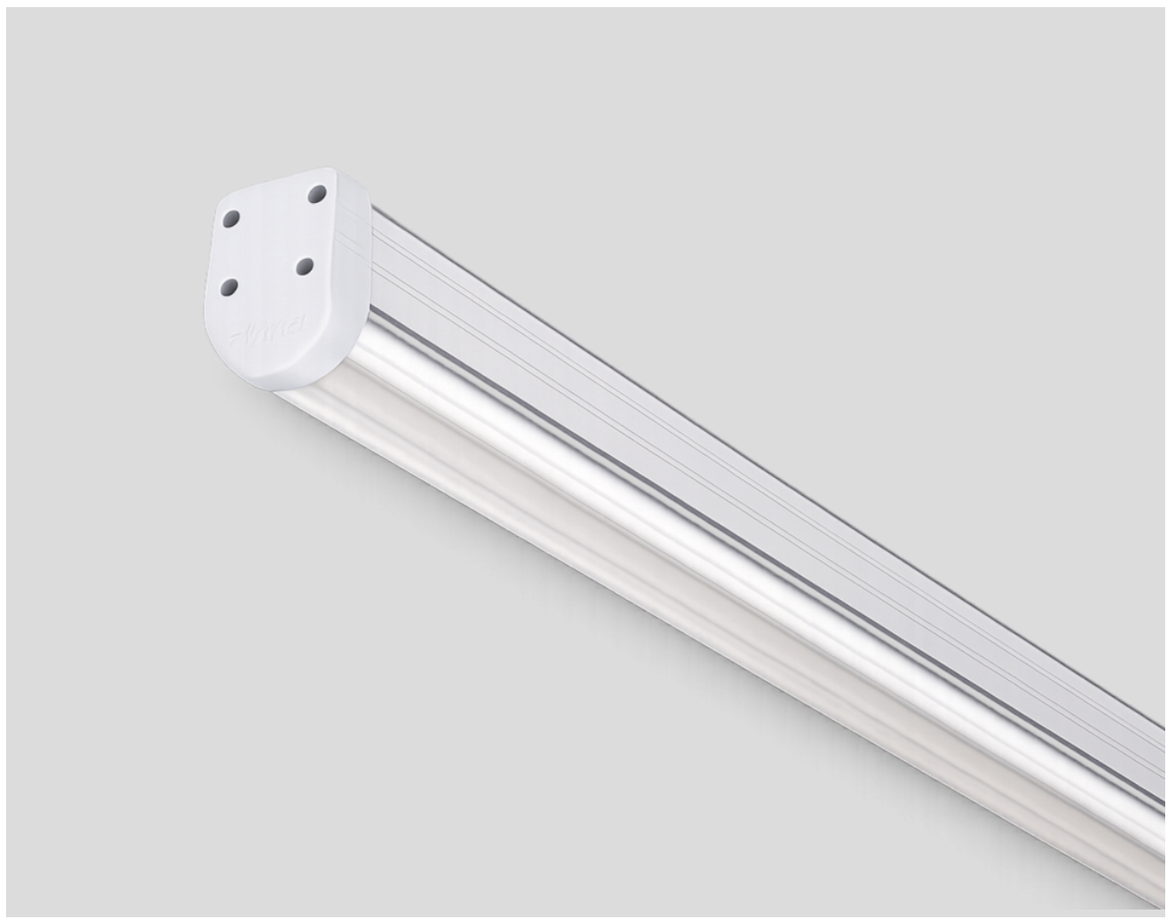


DRAX-A Batwing


07112


Maximum Vertical Illumination with Batwing Optics

Drax-A Batwing is a professional lighting solution designed for warehouses, logistics facilities, and industrial sites, combining a durable aluminum housing with high-efficiency batwing optics. Its anodized aluminum body ensures mechanical strength, longevity, and effective thermal management, while silicone gasketing provides IP64 rated protection.

Featuring specialized batwing optics with a 165°x130° light distribution, the fixture effectively directs light not only to the floor but also to shelf surfaces and vertical areas. This enables more uniform illumination in high-bay warehouses, logistics centers, aisles, and parking garages, while allowing for the optimization of the total number of fixtures required.

RAL 9006

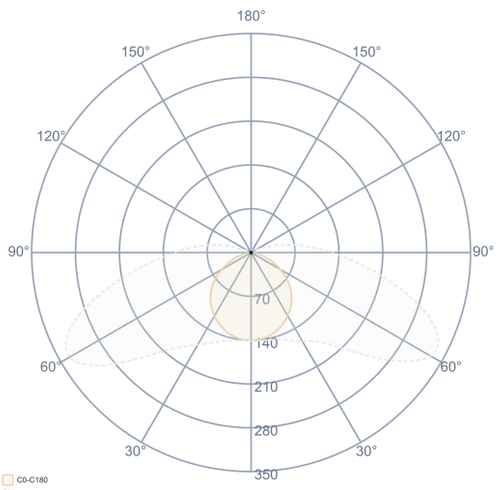

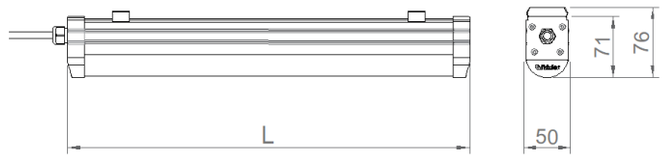

General Information	
Housing	Aluminum Extruded
Side Cover	PC Injection + Silicone Gasket
Diffuser	Batwing Acrylic Lens + PC Opal
Paint	Anodized Coating
Insulation Class	Class I
Product Dimensions [mm]	50(W) x 71(H)

Electrical Info	
Power	21-54W
Power Factor	>0.95
Light Source	Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	165°x130°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Angle	CCT	L (mm)	Kg
07112.06.30.021	21	2460	165°-130°	3000	580	0,60
07112.06.40.022	21	2520	165°-130°	4000	580	0,60
07112.08.30.030	32	3750	165°-130°	3000	860	0,80
07112.08.40.031	32	3840	165°-130°	4000	860	0,80
07112.12.30.042	43	5050	165°-130°	3000	1140	1,50
07112.12.40.043	43	5160	165°-130°	4000	1140	1,50
07112.14.30.063	54	6350	165°-130°	3000	1420	1,90
07112.14.40.064	54	6480	165°-130°	4000	1420	1,90

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com