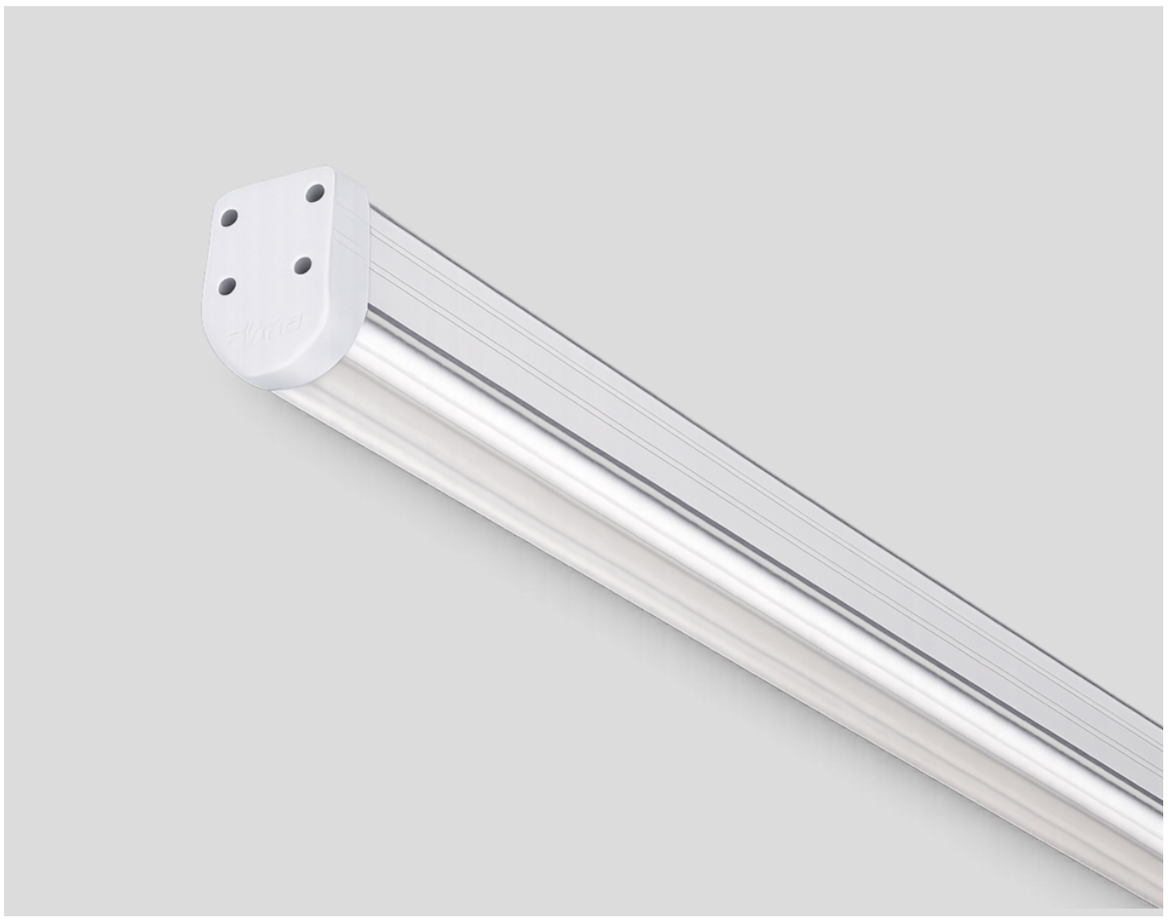

DRAX-A Batwing

07112

Maximum Vertical Illumination with Batwing Optics

Draw IP65 combines aesthetic appeal with a high level of protection thanks to its slim and compact design. Its CO-EX extruded PC housing offers a lightweight, durable, and corrosion-resistant structure.

The product features an aluminum inner profile where the LED modules and driver are mounted. This structure provides heat management, increasing LED lifespan and supporting mechanical strength. Maintenance and servicing are easily performed thanks to the screw-on side cover system.

It is reliable and long-lasting for corridors, technical areas, parking lots, production areas, warehouses, and humid environments. Its IP65 protection level provides high resistance to dust and moisture.

RAL 9006

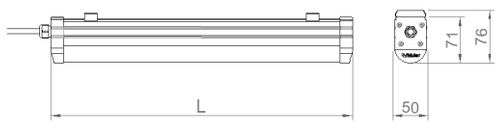

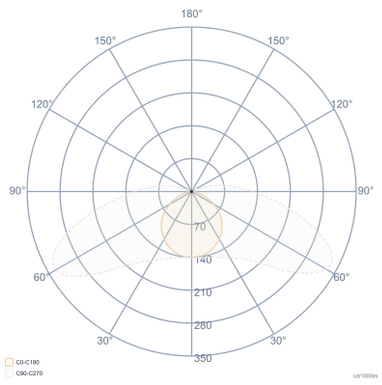

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	**Power**	21-54W	**Light Output Angle**	165°x130°
Side Cover	PC Injection + Silicone Gasket	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 22
Diffuser	Batwing Acrylic Lens + PC Opal	**Light Source**	Mid Power LED	**CRI [Ra]**	CRI ≥ 80
Paint	Anodized Coating	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Insulation Class	Class I	**Input Voltage**	220-240V AC / 50-60 Hz		
Product Dimensions [mm]	50(W) x 71(H)	**LED Driver**	Constant Current		
		Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Angle	CCT	L (mm)	Kg
07112.06.30.021	21	2460	165°-130°	3000	580	0,60
07112.06.40.022	21	2520	165°-130°	4000	580	0,60
07112.08.30.030	32	3750	165°-130°	3000	860	0,80
07112.08.40.031	32	3840	165°-130°	4000	860	0,80
07112.12.30.042	43	5050	165°-130°	3000	1140	1,50
07112.12.40.043	43	5160	165°-130°	4000	1140	1,50
07112.14.30.063	54	6350	165°-130°	3000	1420	1,90
07112.14.40.064	54	6480	165°-130°	4000	1420	1,90

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com