

RAL 9006


SPACE IP65


08131

Protected LED Bar for Harsh Environments

Space IP65, as the high-protection version of the Sinus LED Bar series, is developed for applications requiring resistance to dust and moisture. Its aluminum housing and IP65-protected socket cable connection offer a reliable lighting solution. The LED modules are coated with a special protective resin. This prevents water, moisture, and dust from reaching the LED components, increasing the product's durability and lifespan.

It is an ideal solution, especially for outdoor architectural lighting, facade details, eaves, niche applications, landscape elements, under shelves, corridors, and decorative concealed lighting projects.

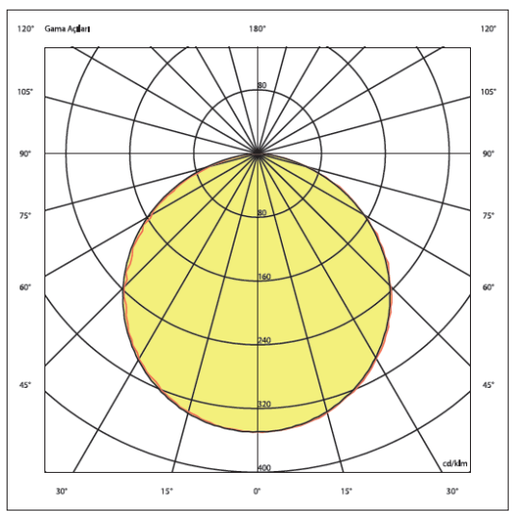

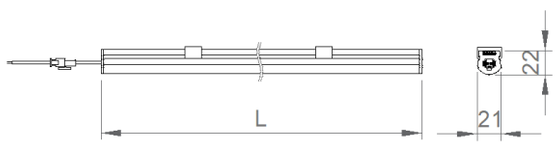

General Information	
Housing	Aluminum Extruded
Optics	Extrusion Diffuser
Paint	Anodized Coating
Insulation Class	Class I
Product Dimensions [mm]	21(W)x515(L)x22(H)
Mounting Type	Surface

Electrical Info	
Power	7-14W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Voltage
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W/m	Lm	CCT	WxLxH (mm)	Kg
08131.10.40.014	14	1450	4000	21x1015x22	0,40

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com