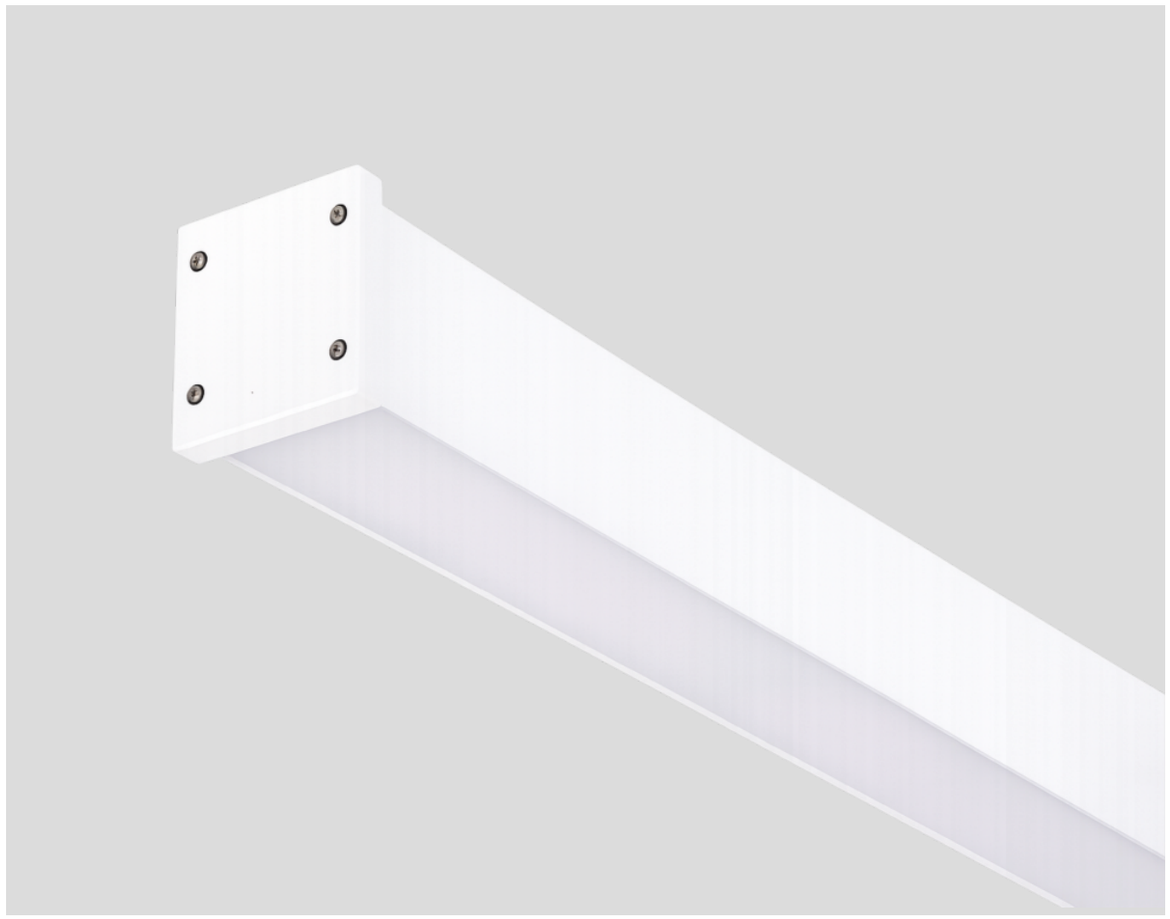


RAL 9016 RAL 9005 RAL 9006

WATERLINE 080-IP65


01194


IP65 Industrial Lighting Luminaire

Waterline 080 Series is a durable lighting solution developed for demanding environments, featuring IP65 and IK10. Its aluminum body and cover construction provide high mechanical strength and long-lasting performance. The specially designed diffuser with an integrated silicone gasket ensures reliable protection against dust and moisture, enabling the luminaire to achieve its IP65 protection rating. At the same time, it delivers uniform and comfortable illumination, enhancing visual comfort.

Metro stations, high-speed rail platforms, tunnels, pedestrian underpasses, parking facilities and industrial environments. With different lengths, color temperature options and control alternatives, it can be adapted to project-specific requirements.

CE IK10 GLOW WIRE 650°C IP65 RoHS COMPLIANT

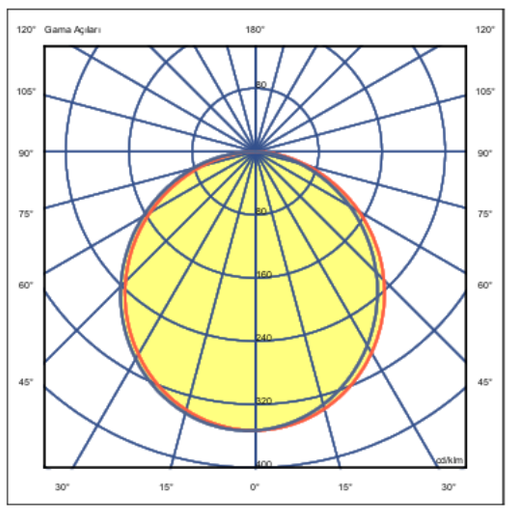

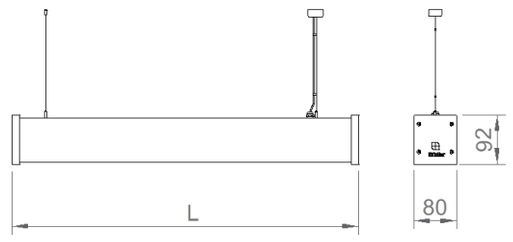

General Information	
Housing	Extruded Aluminum Profile
Side Cover	Aluminum Injection
Optics	Silicone Sealed Extruded PC
Paint	Electrostatic Powder Paint
Product Dimensions [mm]	80(W) x 92(H)
Mounting Type	Surface and Pendant
Mounting Part	Height Adjustable Steel Spring + Wire

Electrical Info	
Power	18-65W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Saat

Lighting Technology	
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
01194.89.30.019	18	1900	3000	80x92x595	1,70
01194.89.40.020	18	2000	4000	80x92x595	1,70
01194.89.30.029	27	2900	3000	80x92x875	2,30
01194.89.40.030	27	3000	4000	80x92x875	2,30
01194.89.30.039	38	3900	3000	80x92x1155	2,90
01194.89.40.041	38	4100	4000	80x92x1155	2,90
01194.89.30.049	46	5000	3000	80x92x1435	3,50
01194.89.40.052	46	5200	4000	80x92x1435	3,50
01194.89.30.059	56	6000	3000	80x92x1715	4,10
01194.89.40.062	56	6200	4000	80x92x1715	4,10
01194.89.30.069	65	7000	3000	80x92x1995	4,80
01194.89.40.072	65	7200	4000	80x92x1995	4,80

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com