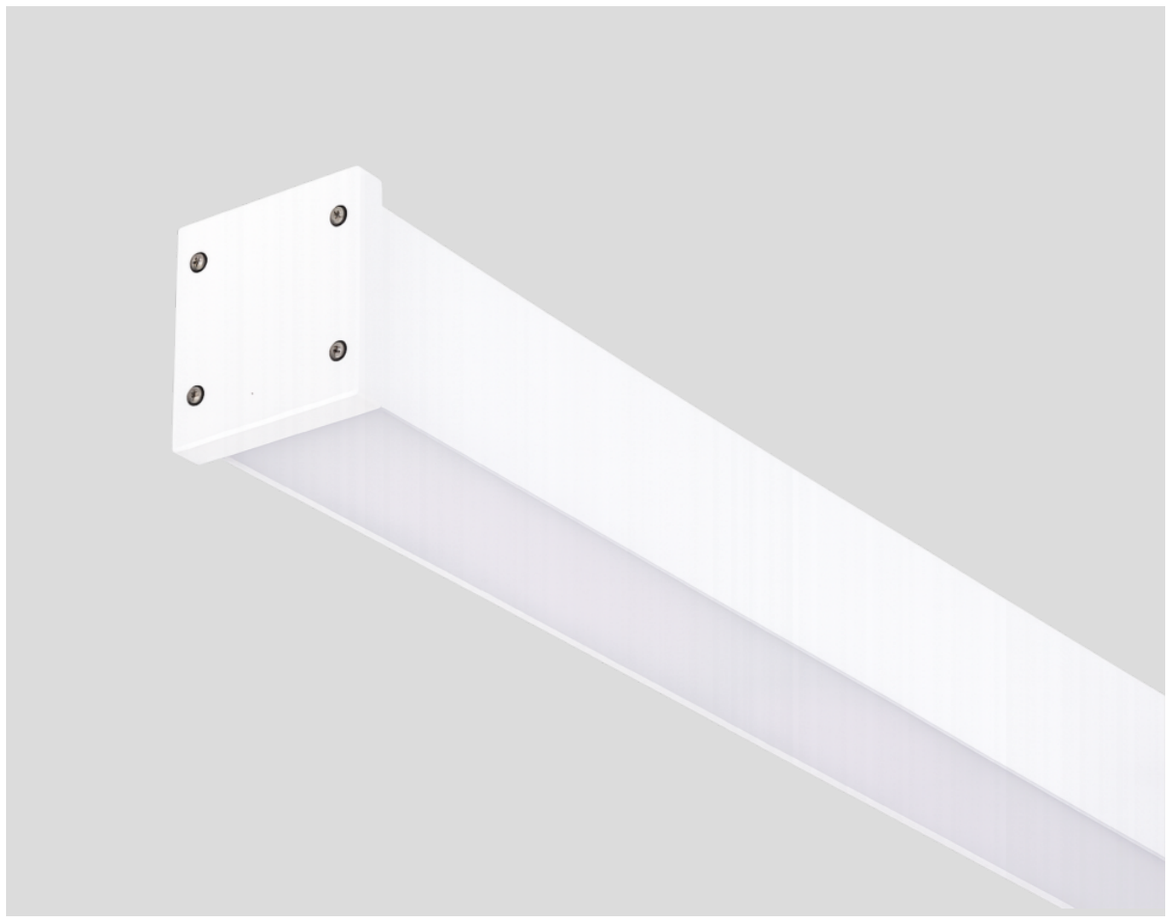


RAL 9016 RAL 9005 RAL 9006


# WATERLINE 080-IP65


# 01194

## IP65 Industrial Lighting Luminaire

Waterline 080 Series is a durable lighting solution developed for demanding environments, featuring IP65 and IK10. Its aluminum body and cover construction provide high mechanical strength and long-lasting performance. The specially designed diffuser with an integrated silicone gasket ensures reliable protection against dust and moisture, enabling the luminaire to achieve its IP65 protection rating. At the same time, it delivers uniform and comfortable illumination, enhancing visual comfort.

Metro stations, high-speed rail platforms, tunnels, pedestrian underpasses, parking facilities and industrial environments. With different lengths, color temperature options and control alternatives, it can be adapted to project-specific requirements.

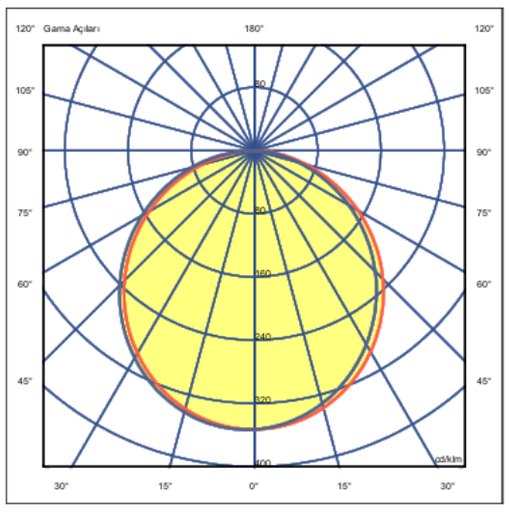

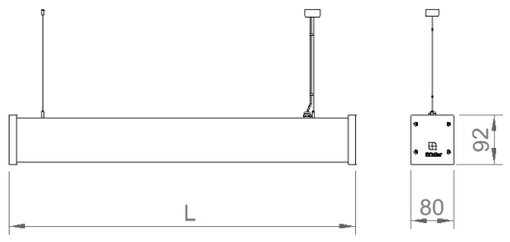
| General Information | | Electrical Info | | Lighting Technology | |
|---|---|---|---|---|---|
| **Housing** | Extruded Aluminum Profile | **Power** | 18-65W | **Light Output Angle** | 110° |
| **Side Cover** | Aluminum Injection | **Power Factor** | >0.95 | **UGR Value** | UGR ≤ 22 |
| **Optics** | Silicone Sealed Extruded PC | **Light Source** | SMD Mid Power LED | **CRI [Ra]** | CRI ≥ 80 |
| **Paint** | Electrostatic Powder Paint | **Cabling** | Halogen-Free | **Color Bin Value** | Mc Adams ≤ 3 |
| **Product Dimensions [mm]** | 80(W) x 92(H) | **Input Voltage** | 220-240V AC / 50-60 Hz | | |
| **Mounting Type** | Surface and Pendant | **LED Driver** | High Efficiency Constant Current Output | **Optional** | |
| **Mounting Part** | Height Adjustable Steel Spring + Wire | **Ambient Temperature** | -20°C / +50°C | DALI / 1-10V | |
| | | **LED Lifetime L70** | >102.000 Saat | CRI>90 , 2700K~6500K , Tunable White | |
| | | | | Emergency Lighting Unit | |

| Order Code | W | Lm | CCT | WxLxH (mm) | Kg |
|---|---|---|---|---|---|
| 01194.89.30.039 | 38 | 3900 | 3000 | 80x92x1155 | 2,90 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com