


# Reed

Indoor Lighting - Appliques

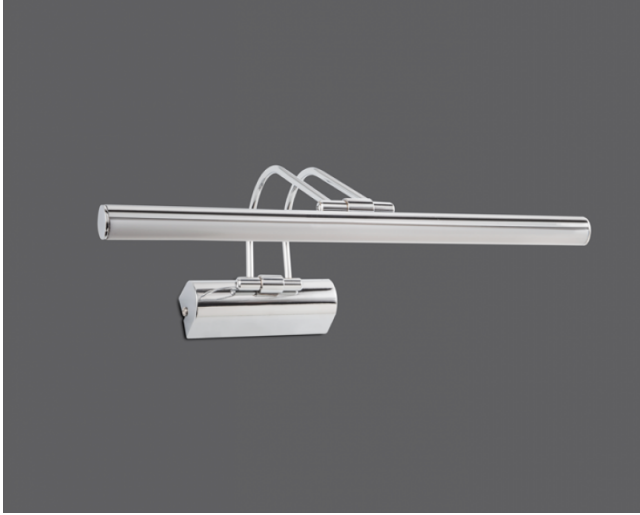

## TECHNICAL INFORMATION

|                        |                            |
|------------------------|----------------------------|
| <b>Housing</b>         | Nickel chrome plated brass |
| <b>LED Lifetime</b>    | 50.000 hours               |
| <b>L80B50</b>          |                            |
| <b>Mounting System</b> | Surface                    |

## OPTICAL SPECIFICATIONS

|                                |              |
|--------------------------------|--------------|
| <b>Light Distribution</b>      | Symmetrical  |
| <b>Light Output Angle</b>      | 120°         |
| <b>UGR Value</b>               | 80           |
| <b>Color Bin Value</b>         | Mc Adams < 3 |
| <b>Color Temperature (CCT)</b> | 3000K/4000K  |



## ELECTRICAL

|                      |                     |
|----------------------|---------------------|
| <b>Power (W)</b>     | 5W                  |
| <b>Power Factor</b>  | >95                 |
| <b>Light Source</b>  | SMD Mid Power LED   |
| <b>Cabling</b>       | Halogen-Free        |
| <b>Input Voltage</b> | 220-240V / 50-60 Hz |

## OPTIONAL

## ASSEMBLY

**Installation Type** Surface Mounted

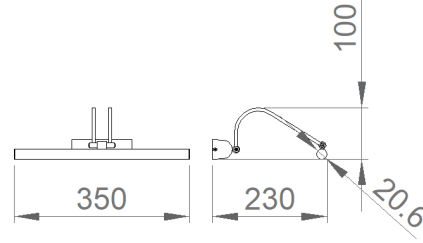

| Order Code      | W | Lm  | CCT  | CRI   | WxLxH (mm)  | Kg  |
|-----------------|---|-----|------|-------|-------------|-----|
| 61169.42.40.005 | 5 | 500 | 4000 | Ra>80 | 350x230x100 | 0,2 |

